

1					2					3					4					5					6					7				
A					B					C					D					E														
SCHEMATIC																																		
MODEL NO.					A					B					C					D					E									

15.	Washer	0.5T Steel	1	Nickel Plated
-----	--------	------------	---	---------------

14.	Nut	2.0T Steel	1	Nickel Plated
-----	-----	------------	---	---------------

13.	Cover	PC	1	Transparent
-----	-------	----	---	-------------

12.	Housing	PBT	1	Black Color
-----	---------	-----	---	-------------

11.	Metal Ring	Brass	1	Nickel Plated
-----	------------	-------	---	---------------

10.	Insulator	POM	2	Black Color
-----	-----------	-----	---	-------------

9.	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
----	---------------	----------------------	---	---------------

8.	Breck Terminal	0.35T Phosphor Bronze	1	Silver Plated
----	----------------	-----------------------	---	---------------

7.	Transfer Terminal	0.4T Brass	1	Silver Plated
----	-------------------	------------	---	---------------

6.	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
----	---------------	----------------------	---	---------------

5.	Breck Terminal	0.35T Phosphor Bronze	1	Silver Plated
----	----------------	-----------------------	---	---------------

4.	Transfer Terminal	0.4T Brass	1	Silver Plated
----	-------------------	------------	---	---------------


3.	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
----	-------------	-----------------------	---	---------------

2.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
----	------------	----------------------	---	---------------

1.	Earth Terminal	0.3T Phosphor Bronze	1	Silver Plated
----	----------------	----------------------	---	---------------

NO.	Description	Material	Q'TY	Finish
-----	-------------	----------	------	--------

大 廣 有 限 公 司 DA KOANG CO., LTD.				
PART NAME :6.3Ø PHONE JACK		PART NUMBER: DK1799 SERIES		
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED		UNIT:mm		
		SCALE:1/1		
DATE		DWN	CHKD	APVD
10.12.2011				MANAGER

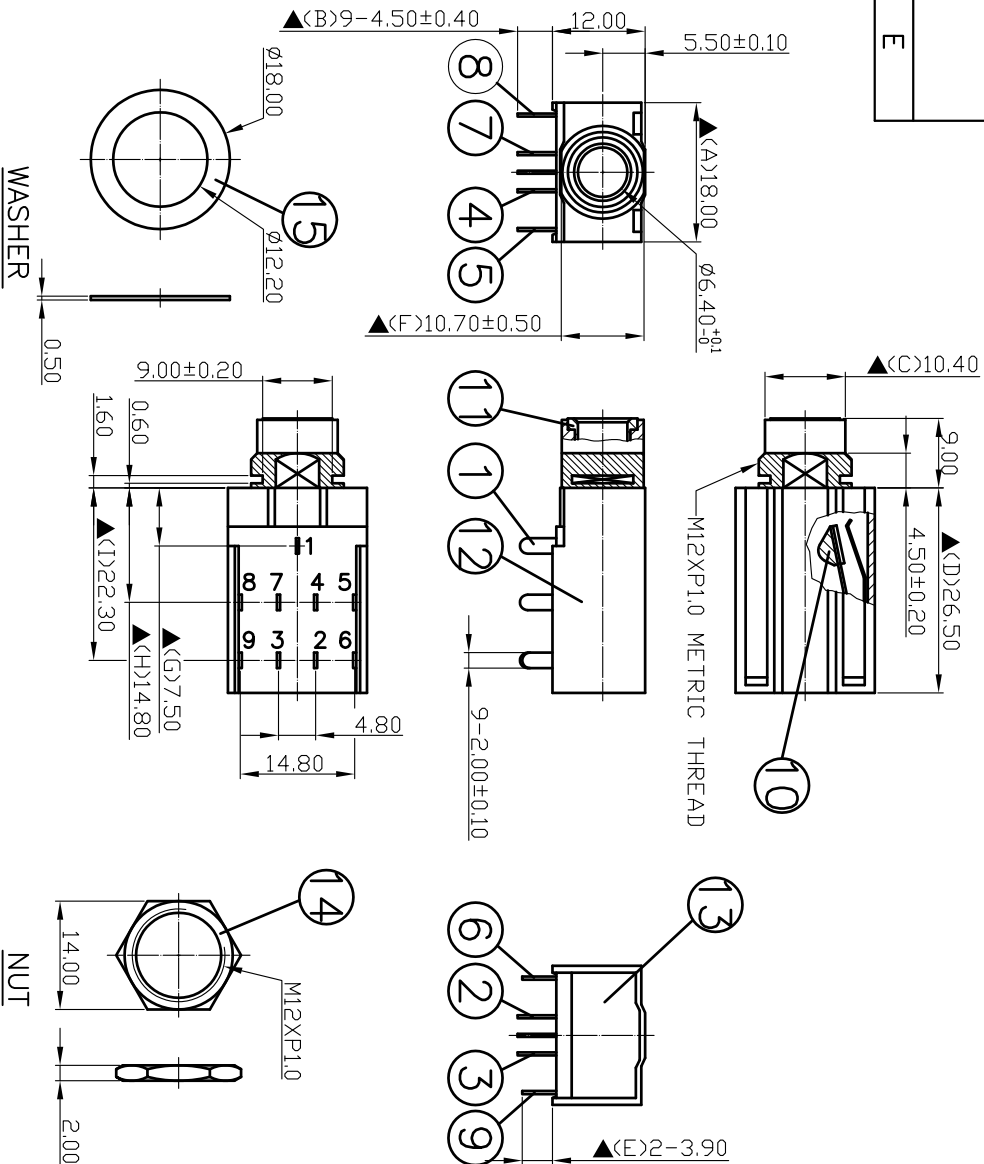

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

RoHS Compliant
For Reference
僅供參考