


1					2					3					4					5					6					7				
A					B					C					D					E														
SCHEMATIC																																		
MODEL NO.					A					B					C					D					E									

15.	Washer	0.5T Steel	1	Nickel Plated
14.	Nut	2.0T Steel	1	Nickel Plated
13.	Cover	PC	1	Transparent
12.	Housing	PBT	1	Black Color
11.	Metal Ring	Brass	1	Nickel Plated
10.	Insulator	POM	2	Black Color
9.	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
8.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
7.	Transfer Terminal	0.4T Brass	1	Silver Plated
6.	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
5.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
4.	Transfer Terminal	0.4T Brass	1	Silver Plated
3.	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
2.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.3T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

B					C					D					E				
15.					10.					5.					1.				
Washer					Insulator					Break Terminal					Earth Terminal				
0.5T Steel					POM					0.35T Phosphor Bronze					0.3T Phosphor Bronze				
1					2					1					1				
Nickel Plated					Black Color					Silver Plated					Silver Plated				

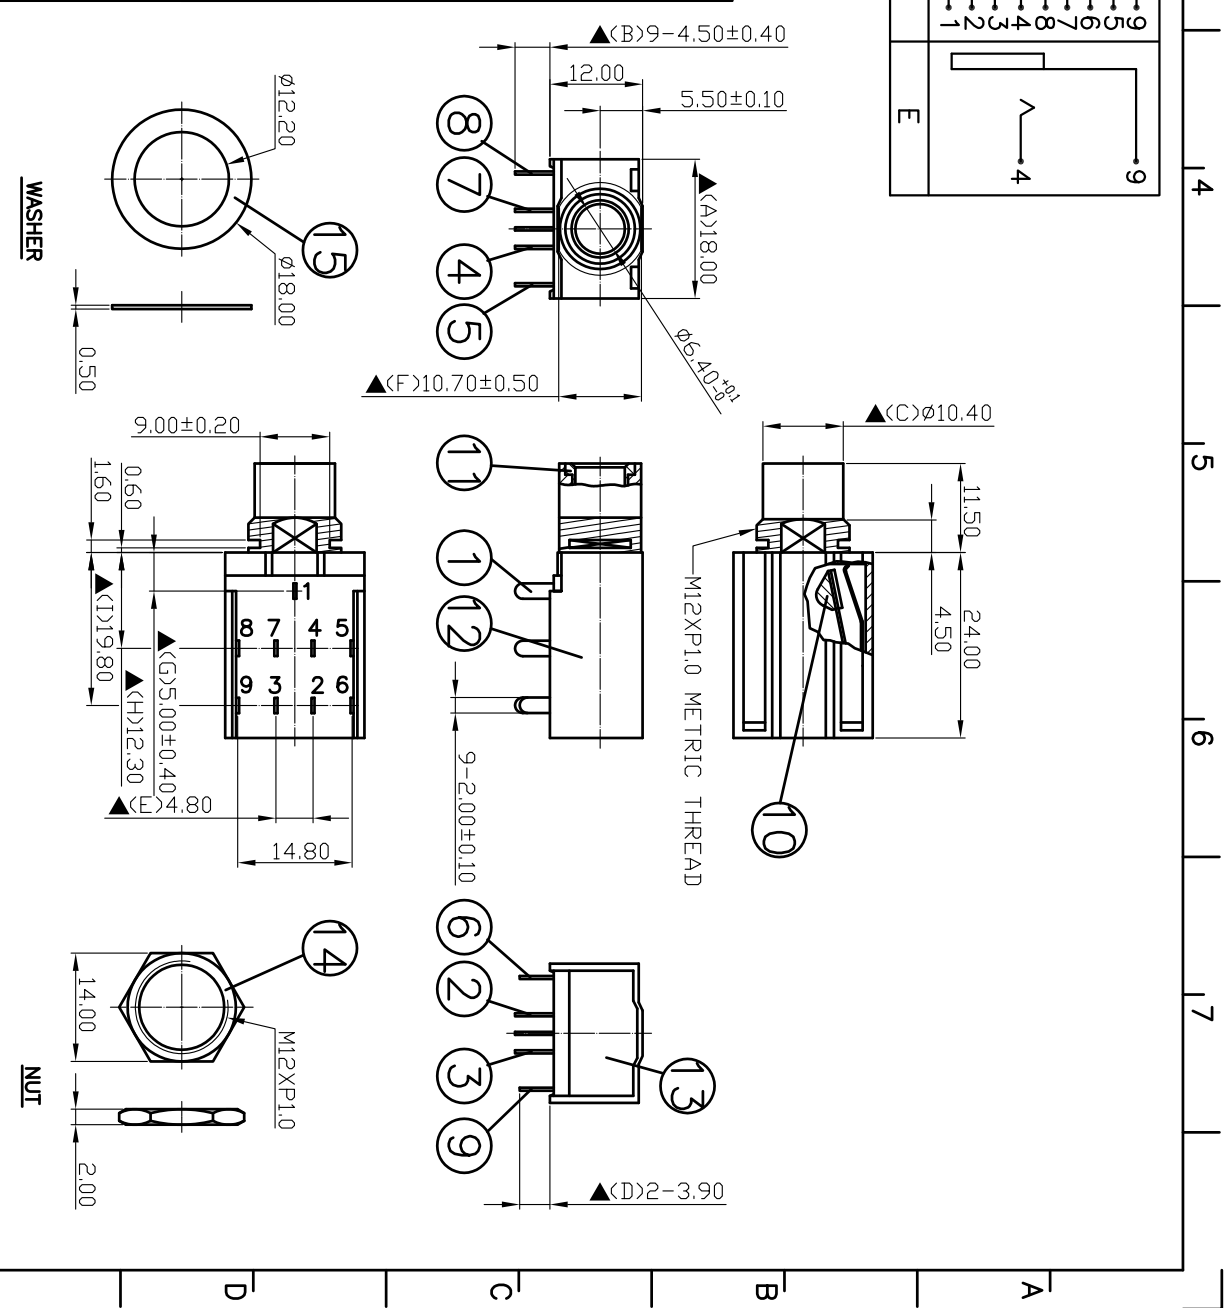

E					D					C					B					A				
大廣有限公司 DAKOANG CO., LTD.					10.12.2011																			
PART NAME :6.3Ø PHONE JACK PART NUMBER: DK1800 SERIES					DATE					DWN					CHKD					APVD				
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED					10.12.2011																			

SPECIFICATIONS:					VERSION:4.0					SCALE:1/1					MANAGER				
Contact Resistance : 30mΩ max					Insulation Resistance : 100MΩ min. at DC 500V					Dielectric Withstand Voltage : AC 500V for one minute					Remark: ▲: The Most Important Dimension				
RoHS Compliant					For Reference														