
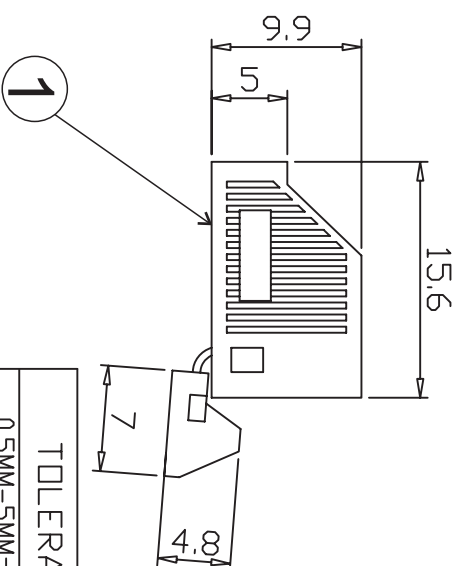
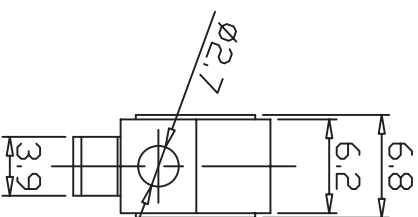
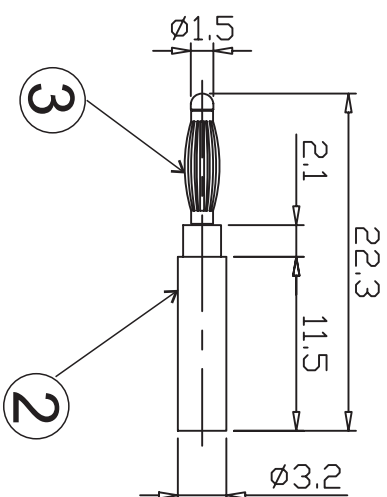


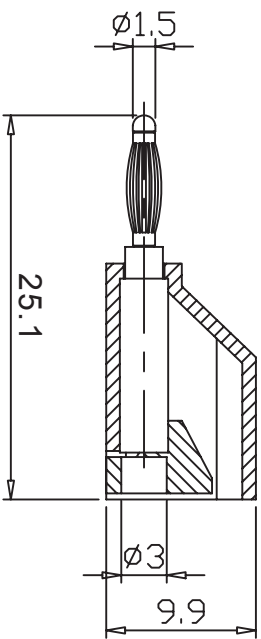

Available color: red/black/green/blue/yellow
 Available plating: Nickel/Gold

No.	Description	Material	Qty
1	HOUSING	PA6 南亚2100ANC1	1
2	Plug (Nickel or Gold)	C3604 Copper Alloy	1
3	Spring (Nickel or Gold)	Beryllium Copper	1

Specification:
 Current Rating: 6A
 Insulating Resistance: DC 500V 100MΩ
 Dielectric Strength: AC1500V 1 minute

TOLERANCES
0.5MM-5MM=±0.2MM
5MM-30MM=±0.4MM
30MM-120MM=±0.6MM
120MM-315MM=±1.0MM
315MM-1000MM=±1.6MM
1000MM-2000MM=±2.4MM

	核准日期	Date	設計	Designed By	比例尺	Scale
		10 Jun 2011	C.J	HUANG	1:1	
100.6.10	更正圖面	核准	Approved By	繪圖	Drew By	單位
修正日期	修正說明	J.F. WANG	C.T	WANG	m/m	
大 廣 有 限 公 司					1433	
DA KOANG COL.TD.					2MM BANANA PLUG	
					REF.NO.	