

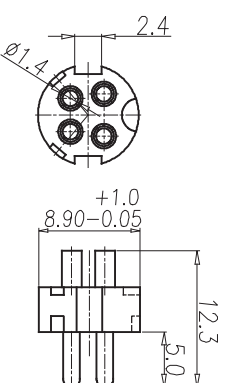


CUSTOMER DRAWING

REV.	DESCRIPTION	APPL. BY	DATE	ECN NO.
A	RELEASE	Fido Weng	12/07/09*	ECN09003
B	RETABLE	Fido Weng	26/06/09*	
C	RETABLE	Fido Weng	23/03/10*	

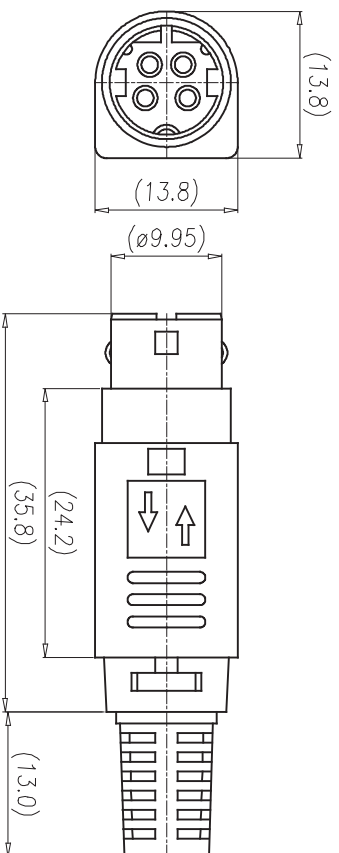

1-1. HOUSING & CONTACT ASSEMBLY

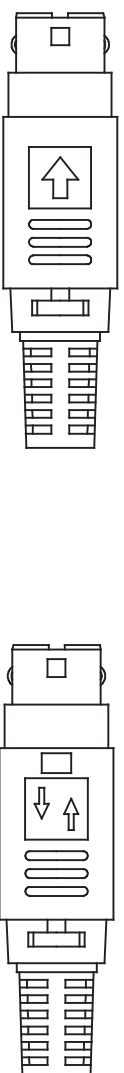

1100-4-7.0	POWER 4PIN (M) 單筋頭黑色	0.8	7.0
1100-4D-6.5	POWER 4PIN (M) 雙筋頭黑色	0.6	6.5
1100-4-GRAY-5.5	POWER 4PIN (M) 雙筋頭白灰色	0.8	5.5
1100-4-4.0	POWER 4PIN (M) 單筋頭黑色	0.8	4.0
1100-4-5.0	POWER 4PIN (M) 雙筋頭黑色	0.8	5.0
1100-4-5.5	POWER 4PIN (M) 單筋頭黑色	0.8	5.5
1100-4-BEG-6.5	POWER 4PIN (M) 雙筋頭貝古色	0.8	6.5
1100-4	POWER 4PIN (M) 單筋頭黑色	0.8	6.5
1100-4D	POWER 4PIN (M) 雙筋頭黑色	0.8	6.5
P/N	DESCRIPTION	CABLE FIXER T	SR 0D

1. MATERIAL:
 - 1-1. HOUSING: PBT, UL94V-0
 - CONTACT: COPPER ALLOY.
 - 1-2. PLASTIC COVER: ABS
 - 1-3. MATEL SHELL: COPPER ALLOY, NICKEL PLATED.
 - 1-4. MATEL CAP: COPPER ALLOY, NICKEL PLATED.
 - 1-5. CABLE FIXER: COPPER ALLOY, TIN PLATED.
 - 1-6. POM RING:POM
 - 1-7. SPRING: STEEL, NICKEL PLATED.
 - 1-8. PLASIC TUBE: ABS
 - 1-9. SR: PVC
2. FINISH:
 - 2-1. CONTACT: SILVER 50u"
 3. ELETRICAL SPECICATION :
 - 3-1. RATED CURRENT : 7.5A/DC MAX
 - 3-2. RATED VOLTAGE : 20V/DC MAX
 4. ENVIRONMENTAL :
 - 4-1. OPERATION TEMPERATURE : -20 t~85t

DRAW	Emily Suen	APPL	Fido Weng	UNIT	mm	TOLERANCE		大 廣 有 限 公 司 DA KOANG CO., LTD.	TITLE	POWER 4PIN (M)	SHEET	
CHECK	Emily Suen	SCALE	1:1	SCALE	1:1	ANGULA ±1'			PART NO.	1100-4	DWG NO.	QCC0361