


3P 180°	4P 210°	5P 180°	5P 240°	6P 240°	7P 270°	8P 270°

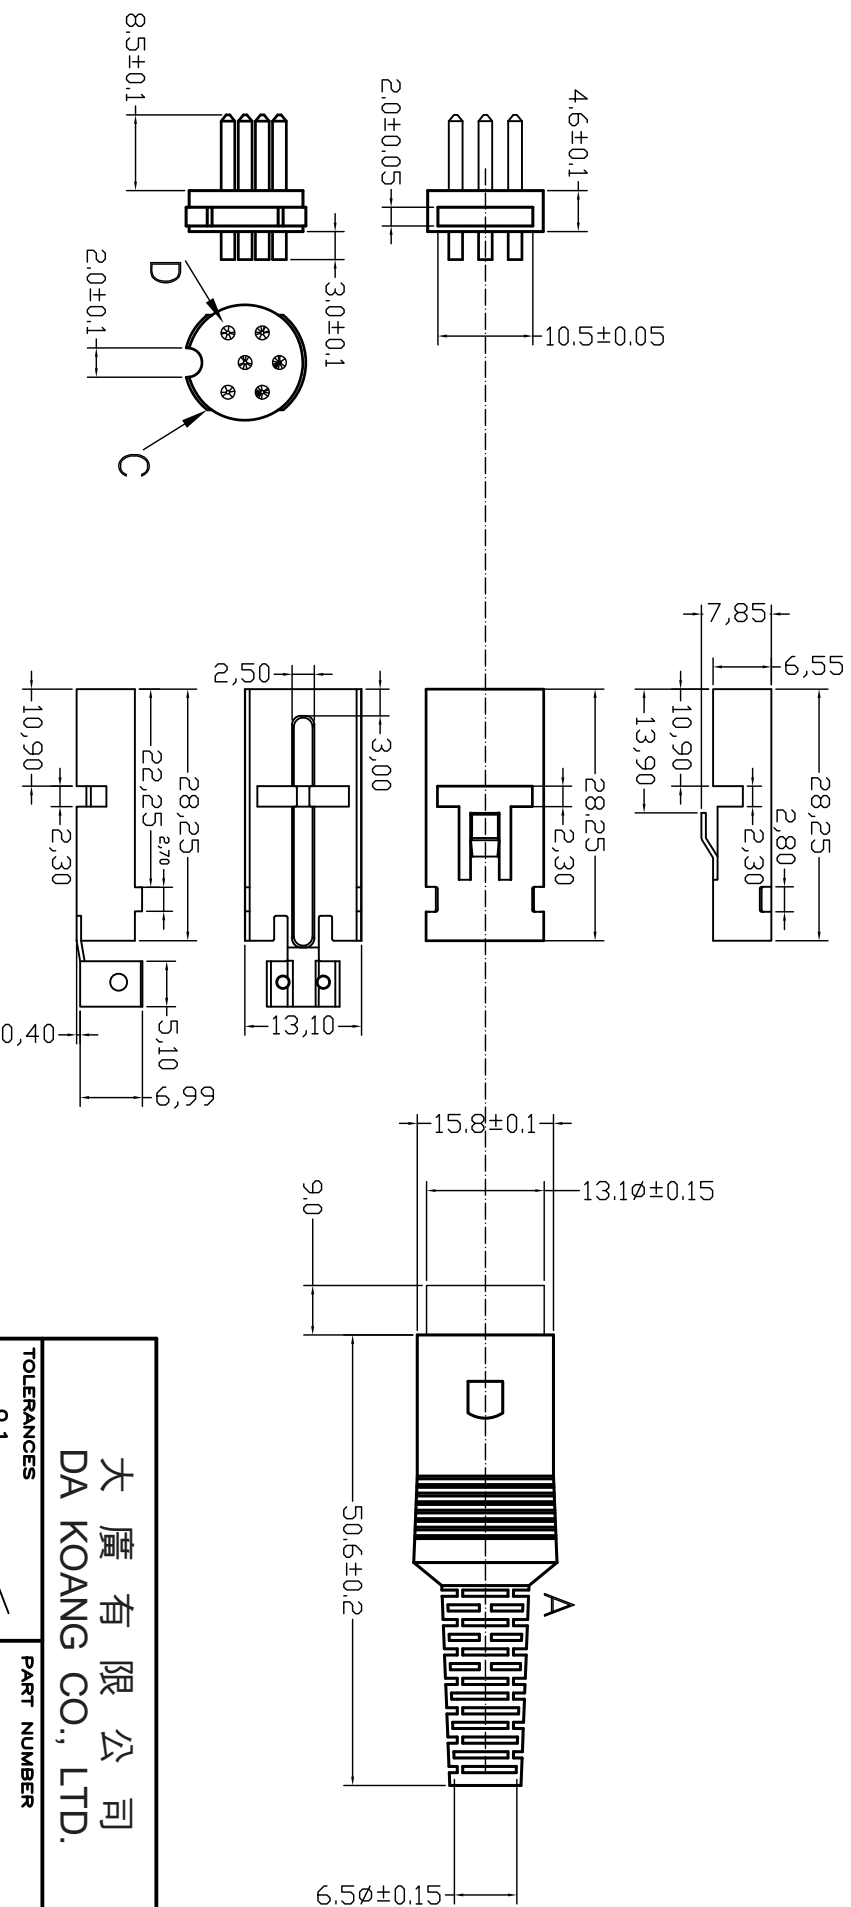

ROHS COMPLIANT  
SPECIFICATIONS:

1. RATING: 100V AC AT 1A
2. INSULATION RESISTANCE: OVER 100M OHM AT 500V DC
3. DIELECTRIC STRENGTH: 250V AC FOR ONE MINUTE

**MATERIALS:**

- A. COVER: EVA
- B. METAL PART: STEEL NICKEL PLATED
- C. INSULATOR: PBT
- D. PIN CONTACT: BRASS NICKEL PLATED

大廣有限公司 DA KOANG CO., LTD.		PART NUMBER <b>1101Ser</b>	
TOLERANCES .X ± 0.1 .XXX ± .XX ± 0.05 ANGLES		DESCRIPTION DIN PLUG ASS'Y TYPE	
DRAFT Ray061810'	SCALE 	CHECK Janne Hung	REV. <b>061810A</b>
APPROVAL Danny Hsu		SHEET 1 / 1	