
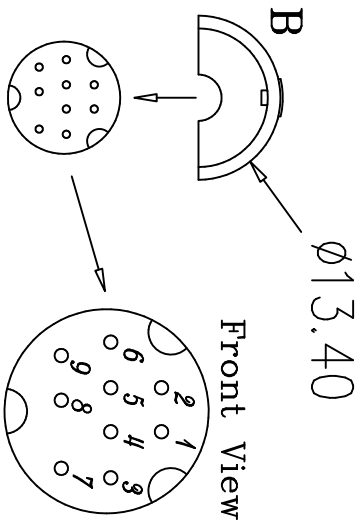


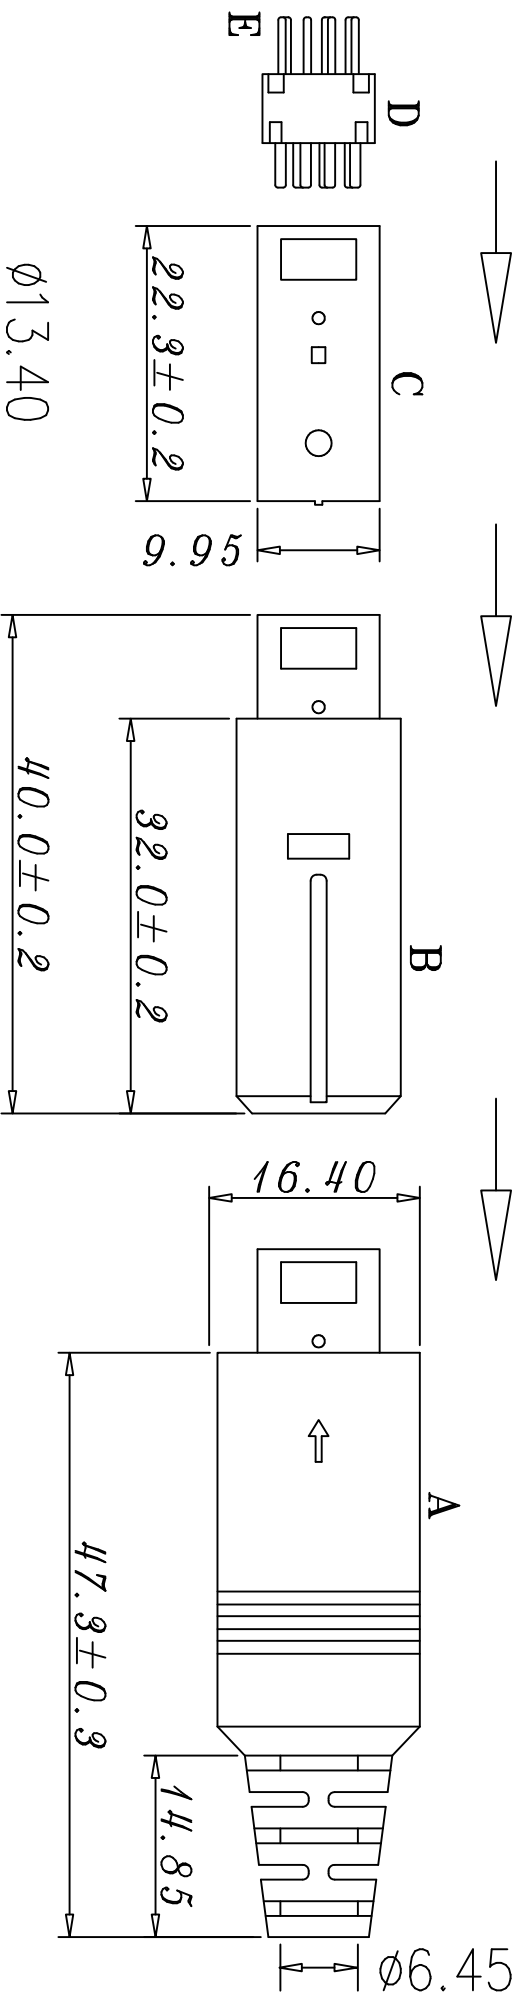

Front View

MATERIAL:

- A. COVER: PE+2L
- B. SHELL: ABS
- C. METAL SHIELD: BRASS NICKEL PLATED
- D. HOUSING: NYLON66+GF
- E. CONTACT: BRASS SILVER PLATED

SPECIFICATIONS:

- 1. RATION: 100V AC 1A MAX OR 12V DC 2A MAX.
- 2. INSULATION RESISTANCE: 50M OHM MIN at 250V DC.
- 3. DIELECTRIC STRENGTH: 250V AC / 1 MINUTE.
- 4. CONTACT RESISTANCE: 30M OHM MAX.
- 5. INSERTION FORCE: 4.5KG MAX.
- 6. WITHDRAWAL FORCE: 0.9KG ~ 3KG.
- 7. OPERATING TEMPERATURE: -20°C ~ 105°C

大 廣 有 限 公 司 DA KOANG CO., LTD.			
TOLERANCES		PART NUMBER	
.X ± 0.1 .XXX ±		1102-9	
.XX ± 0.05 ANGLES			
	mm	SCALE	DESCRIPTION
DRAFT	W. RAY	4/30/12	9 PIN MINI DIN PLUG ASSY TYPE
CHECK	JANNE HUNG	REV.	A
APPROVAL	DANNY HSU	SHEET	1/1