

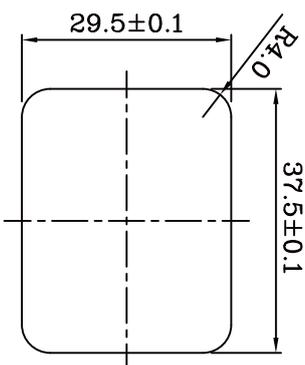


代碼	間隙
12	1.2
15	1.5
17	1.7
20	2.0
25	2.5



PANEL CUT-OUT

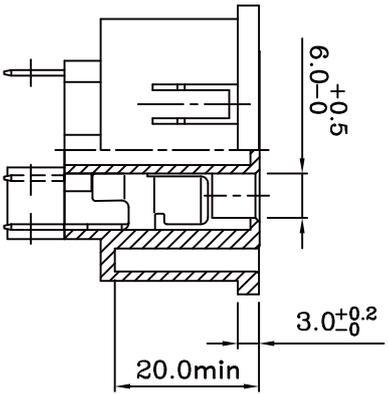

IMPORTANT THIS DRAWING FOR REFERENCE ONLY

注意：此圖只供參考用

- SPECIFICATION:
1. INSULATION RESISTANCE: OVER 100MΩ 500V DC.
 2. DIELECTRIC STRENGTH: 2000V AC ONE MINUTE.
 3. Body Materil: Black Glass-Fiber Thermoplastic . UL 94V-2~0

Rating:AC 20A 250V	
Mark Safety Regulation	cULus
Rating:AC 16A 250V	Safety Regulation
Mark	VDE
	CCC

大 廣 有 限 公 司

DA KOANG CO., LTD.



UNIT
mm

UNIT QTY
1

SCALE
1:1

TOLERANCE
X.XX±0.1
XX.XX±0.2
XXX.XX±0.3

PRODUCT NO.
1099D

REV
C

DRAWN BY

李 小 英
2009.10.14

APPROVED BY

羅 士 凱
2009.10.14

ID NO
09101401Q

INTERIM NO.
NEW NO.

DESCRIPTION