
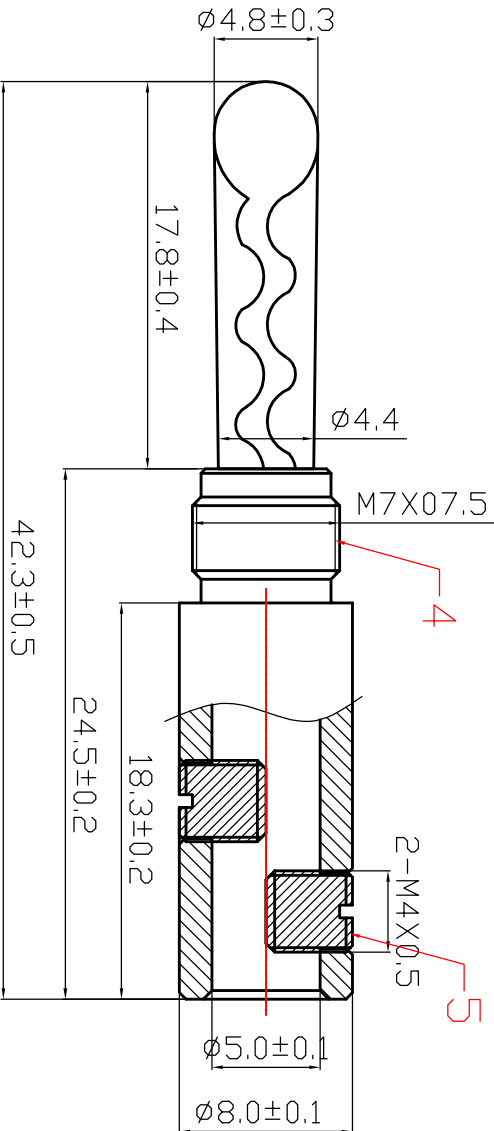


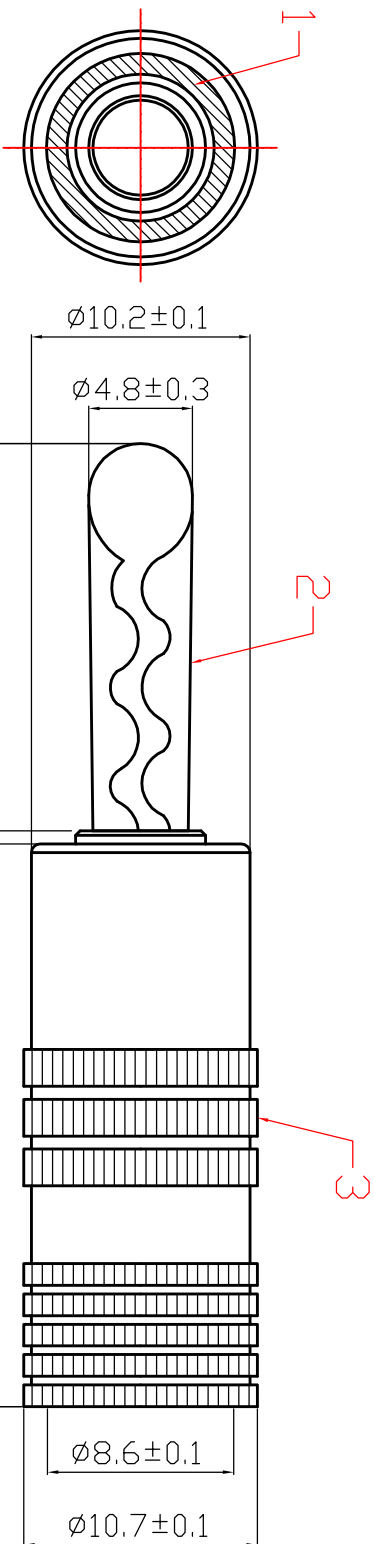

	ELECTRICAL CHARACTERISTIC		
(1)	INNER CONTACT RESISTANCE:<10mΩ		
(2)	OUTER CONTACT RESISTANCE:<2.5mΩ		
(3)	WITHSTAND VOLTAGE:DC1500V		
(4)	CURRENT RATING:3A/DC1500V		
(5)	OPERATING TEMPERATURE:-30/+60℃		
5	SCREW	BRASS	
4	BODY	BRASS	
3	SHELL	Al	
2	BANANA PLUG	BRASS	
1	COPPER GRAIN	BRASS	
ITEM	DESIGNATION	MATERIAL	
REV	PART NO.& SAMPLE NO.	DATE	BY
A	1444		
B			

TOLERANCE	SIGNATURES	DATE
0 - 10 10 - 99 100 - 999 1000 - 9999 10000 - 99999	± 0.05 ± 0.5 ± 10.0 ± 100.00 ± 1000.00	DRAFT: ZHOU XIN GUO CHECKED: 11.01.10

SHEET	SCALE	UNIT	REV
OF	1:1	mm	$\emptyset$

大 廣 有 限 公 司 DA KOANG CO., LTD.	
-----------------------------------	--

TITLE	Can be use as Banana Plug or Jack
CUSTOMER	