




Dimensions in mm

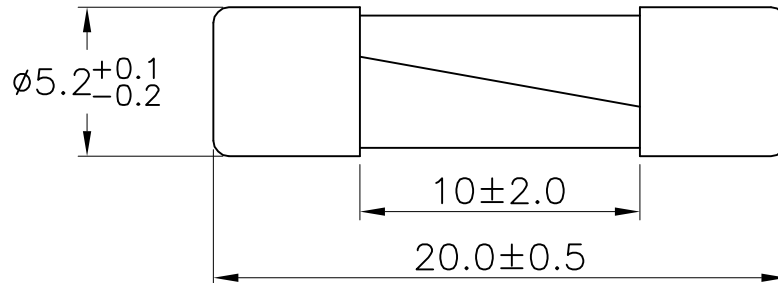

Rated Current	Breaking capacity	Rated Voltage
100mA		125V/250V
125mA		125V/250V
160mA		125V/250V
200mA		125V/250V
250mA		125V/250V
300mA		125V/250V
315mA		125V/250V
400mA		125V/250V
500mA		125V/250V
600mA		125V/250V
630mA		125V/250V
700mA		125V/250V
800mA		125V/250V
1A		125V/250V
1.25A		125V/250V
1.5A	125V/250V	
1.6A	125V/250V	
2A	@125V/AC 100A @250V/AC 100A	125V/250V
2.5A		125V/250V
3A		125V/250V
3.15A		125V/250V
3.5A		125V/250V
4A		125V/250V
5A		125V/250V
6A		125V/250V
6.3A		125V/250V
7A		125V/250V
8A	125V/250V	
10A	125V/250V	
12A	125V/250V	
13A	125V/250V	
15A	125V/250V	
16A	@250V/AC 300A	250V
20A		250V
25A		250V
30A		250V

Rated Current	$1.3 I_n$	$1.6 I_n$	$2 I_n$
I_n	Min.	Max.	Max.
100mA-30A	90 min	60 min	2 min

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm TOLERANCE DECIMALS ANGULAR X ± 0.5 ± 2° XX ± 0.25 DO NOT SCALE DRAWING		CUSTOMER NO.	大廣有限公司 DA KOANG CO., LTD.
		DRAWN BY Allan	
 		CHECKED BY	TITLE 5.2X20mm Fuse
		APPROVED BY	
P/N		DATE 2011.11.29	PART NO. 2085
REV	C	SCALE	DRAWING NO. AA10081706