


Dimensions in mm

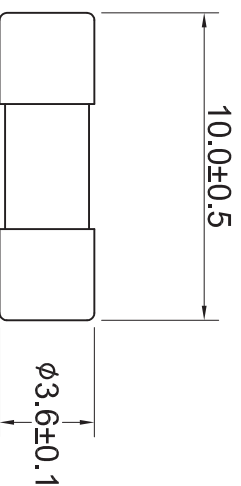

Test Specification according to Standard UL 248-1,14

Electrical Characteristic

Rated Current	1.0 I_n	2.0 I_n
I_n	Min.	Max.
0.1A-15A	4 h	60 S

Rated Current	Breaking capacity	Rated Voltage	MFH,MFH-P/P/PR	
100mA		125V/250V	○	○
125mA		125V/250V	○	○
160mA		125V/250V	○	○
200mA		125V/250V	○	○
250mA		125V/250V	○	○
300mA		125V/250V	○	○
400mA		125V/250V	○	○
500mA		125V/250V	○	○
600mA		125V/250V	○	○
630mA		125V/250V	○	○
700mA		125V/250V	○	○
800mA		125V/250V	○	○
1A		125V/250V	○	○
1.25A		125V/250V	○	○
1.5A		125V/250V	○	○
1.6A		125V/250V	○	○
2A		125V/250V	○	○
2.5A		125V/250V	○	○
3A		125V/250V	○	○
3.15A		125V/250V	○	○
3.5A		125V/250V	○	○
4A		125V/250V	○	○
5A		125V/250V	○	○
6A		125V/250V	○	○
6.3A		125V/250V	○	○
7A		125V/250V	○	○
8A		125V/250V	○	○
10A		125V/250V	○	○
12A		125V	○	
13A		125V	○	
15A		125V	○	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm TOLERANCE		CUSTOMER NO.		大 廣 有 限 公 司 DA KOANG CO., LTD.	
DECIMALS	ANGULAR	DRAWN BY	Allan	TITLE	
X ± 0.5	± 2°	CHECKED BY		3.6x10mm Miniature Fuse	
XX ± 0.25		APPROVED BY		PART NO. 2089B	
DO NOT SCALE DRAWING		DATE	2012.07.29	DRAWING NO. AA05062115	
		SCALE	D		
P/N		REV			