

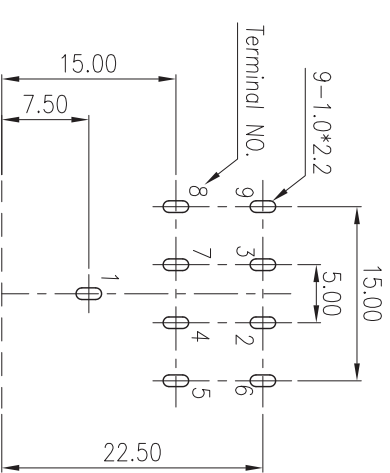

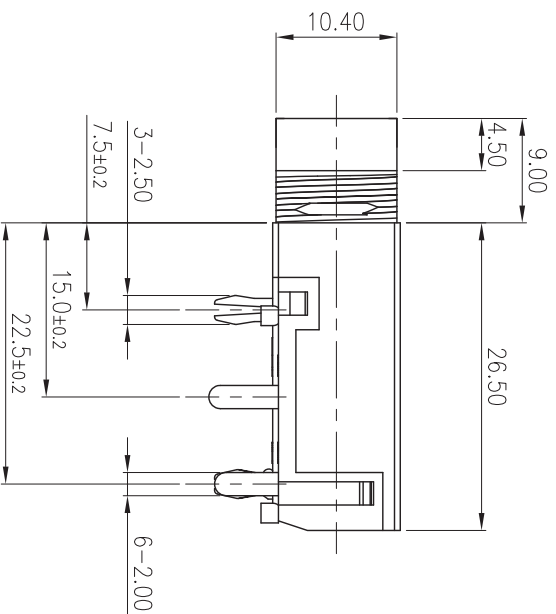
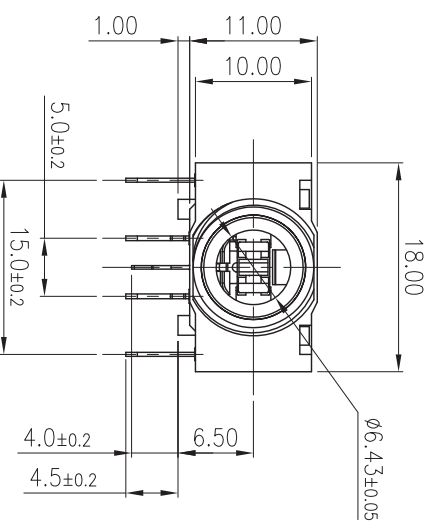


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A		Fuhuojun	2017.08.12

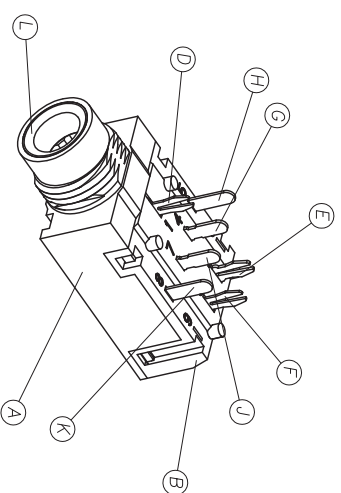

Schematic

RECOMMENDED PCB LAYOUT

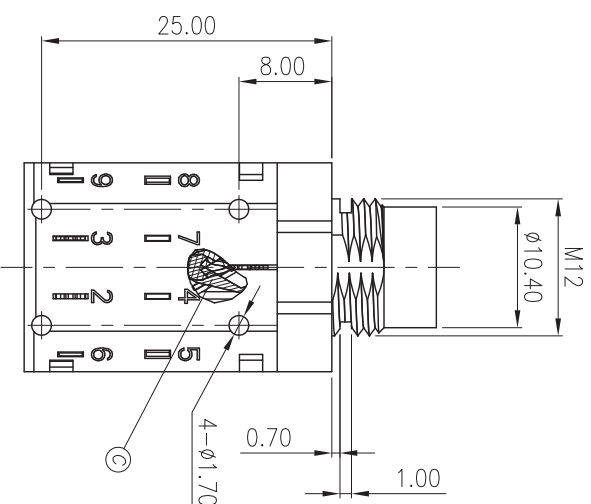

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

- 1-1. RATING: AC 50V, 1.0A
- 1-2. CONTACT RESISTANCE: 30 mΩ Max.
- 1-3. INSULATION RESISTANCE: 100 MΩ Min.
- 1-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V RMS AFTER 1 MINUTE.

2. PART MUST COMPLY ROHS SPECIFICATION.

L	RUN	1	Bross (H59)	Ni
K	PIN-8	1	QSn6.5-0.1	Ag
J	PIN-7	1	Bross (H62)	Ag
H	PIN-5	1	QSn6.5-0.1	Ag
G	PIN-4	1	Bross (H62)	Ag
F	PIN-3	1	QSn6.5-0.1	Ag
E	PIN-2	1	QSn6.5-0.1	Ag
D	PIN-1	1	QSn6.5-0.1	Ag
C	INSULATION	2	POM	Block
B	COVER	1	PC	Block
A	HOUSING	1	PBT UL94V-0	Block
NO.	DESCRIPTION	QTY	MATERIAL	
UNLESS OTHERWISE SPECIFIED TOLERANCES			大 廣 有 限 公 司 DA KOANG CO., LTD.	
DECIMALS:		ANGLES:		NAME
X. :±0.50		X. :±3°		2045
X.X :±0.30		X.X :±2"		DWN
X.XX :±0.20				付华军
				PART NO.
				139-00271001-A
				SCALE: 1:1
				UNIT: MM
				SIZE: A4
				SHEET: 1 OF 1
				REV: A
CUSTOMER COPY				

大 廣 有 限 公 司 DA KOANG CO., LTD.