

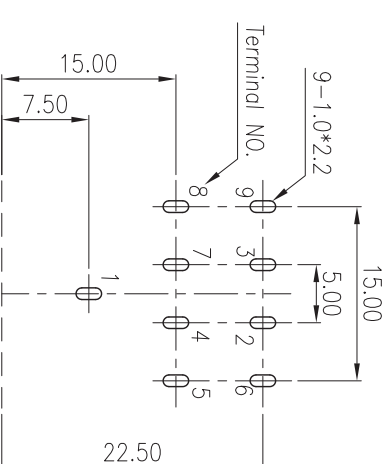

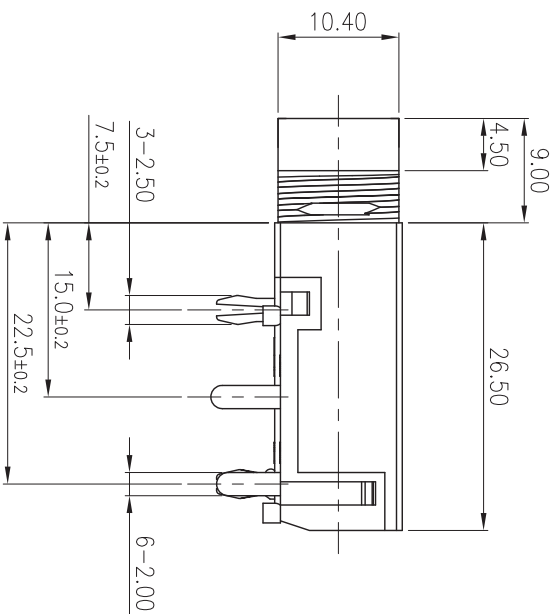
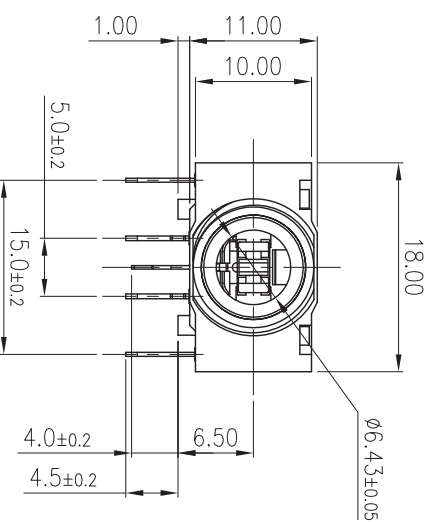


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A		Fuhuojun	2017.08.12

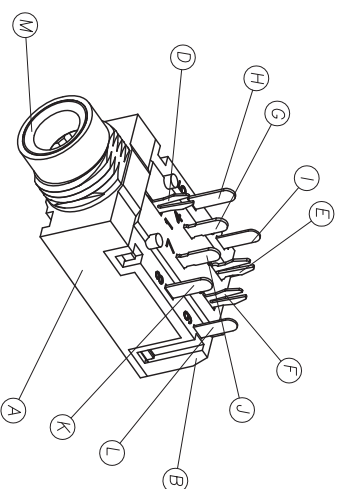

Schematic

RECOMMENDED PCB LAYOUT

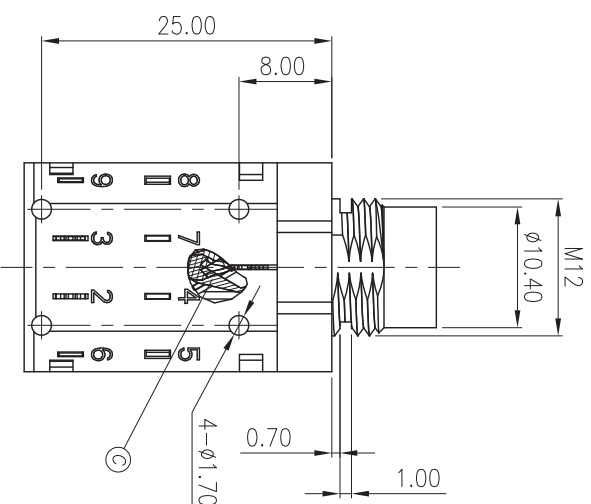

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

1-1. RATING: AC 50V, 1.0A

1-2. CONTACT RESISTANCE: 30 mΩ Max.

1-3. INSULATION RESISTANCE: 100 MΩ Min.

1-4. DIELECTRIC WITHSTANDING VOLTAGE:

500V RMS AFTER 1 MINUTE.

2. PART MUST COMPLY ROHS SPECIFICATION.

M	RUN	1	Brass (H59)	Ni
L	PIN-9	1	QSn6.5-0.1	Ag
K	PIN-8	1	QSn6.5-0.1	Ag
J	PIN-7	1	Brass (H62)	Ag
I	PIN-6	1	QSn6.5-0.1	Ag
H	PIN-5	1	QSn6.5-0.1	Ag
G	PIN-4	1	Brass (H62)	Ag
F	PIN-3	1	QSn6.5-0.1	Ag
E	PIN-2	1	QSn6.5-0.1	Ag
D	PIN-1	1	QSn6.5-0.1	Ag
C	INSULATION	2	POM	Block
B	COVER	1	PC	Block
A	HOUSING	1	PBT UL94V-0	Block
NO.	DESCRIPTION	QTY	MATERIAL	
UNLESS OTHERWISE SPECIFIED TOLERANCES				
大 廣 有 限 公 司 DA KOANG CO., LTD.				
DECIMALS:		NAME		
ANGLES:		2046		
X. :±0.50	X. :±3°	DWN	付华军	PART NO.
X.X :±0.30	X.X :±2"	CHKD		SCALE: 1 : 1
X.XX :±0.20		APVD		SIZE: A4
			SHEET: 1 OF 1	REV: A
CUSTOMER COPY				