

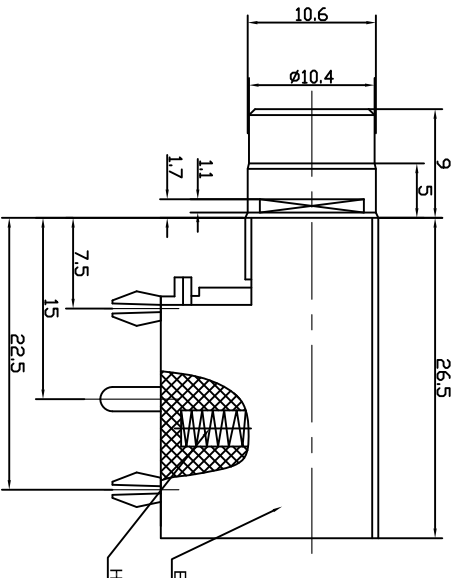




REV.	ECN NO	DESCRIPTION	REVISED	DATE
A1	——	第一次圖面	HAW	2010.06.20

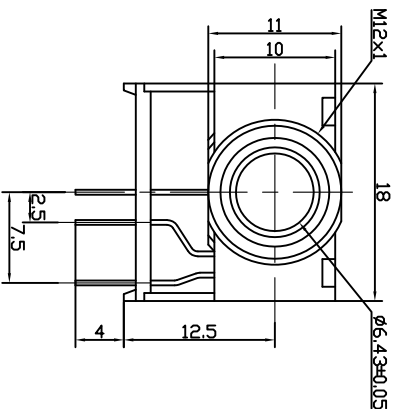

- SPECIFICATION**
- Voltage Rating : DC50V
 - Current Rating : 1A
 - Contact resistance : 30mΩ Max
 - Insulation resistance : 100MΩ Min. (DC500V) for one minute
 - Dielectric withstand voltage : AC500V for 5 secs Min
 - Operating temperature range -40~70℃

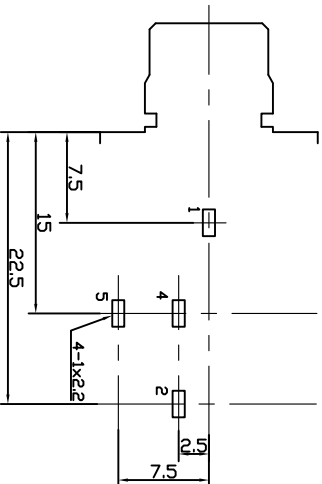

Recommend PCB layout
(Jack TOP View)
Tolerances: ± 0.05
Recommend PCB Thickness: 1.6mm

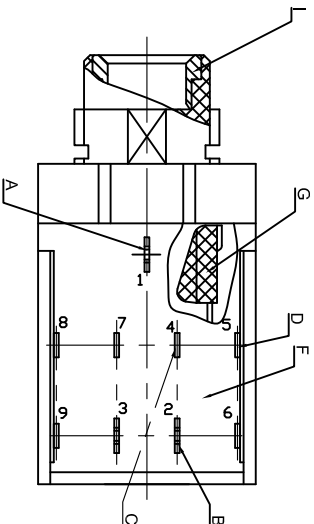

Schematic

I	Metal Ring	1	CK-6.35-02-101	H59	NI	
H	Spring	1	CK-6.35-10-101	M65	NI	
G	Insulator	1	CK-6.35-01-203	PDM	Black	
F	Cover board	1	CK-6.35-10-202	PC	Black	
E	Housing	1	CK-6.35-11-201	ABS	Black	
D	5#Pin	1	CK-6.35-10-105	QSn6.5-0.1-0.35T	Ag	
C	4#Pin	1	CK-6.35-10-104	H62-0.4Y	Ag	
B	2#Pin	1	CK-6.35-10-102	QSn6.5-0.1-0.4Y	Ag	
A	1#Pin	1	CK-6.35-10-101	QSn6.5-0.1-0.3T	Ag	
NL	PART NAME	Q'TY	PART NUMBER	MATERIAL	PLATING & COLOR	REMARK

UNLESS OTHERWISE SPECIFIED TOLERANCES		DECIMALS: X ± 0.5 XX ± 0.4 XXX ± 0.3		ANGLES: X $\pm 2^\circ$ XX $\pm 0.1^\circ$	
SCALE:ND	UNIT: mm	PROJECTION	Φ	P/N	CK-6.35-11-4P
SIZE: A3	PAGE:1 OF 1	REV: A1	DWG.ND:		CK-6.35
APPROVED BY	CHECKED BY				PREPARED BY
YSG	ZY				HAW

大 廣 有 限 公 司 DA KOANG CO., LTD.

TITLE: 2047

CUSTOMER COPY