

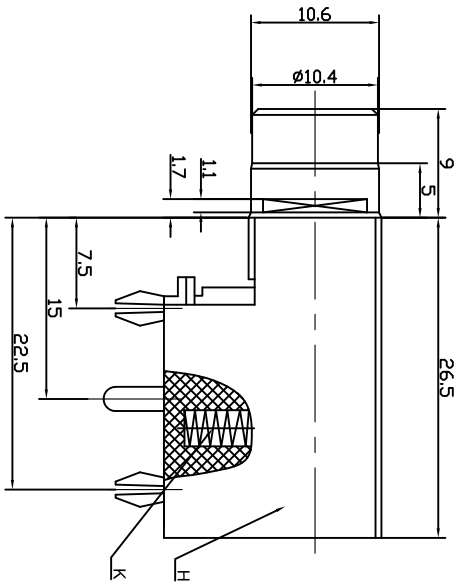




REV.	ECN NO	DESCRIPTION	REVISED	DATE
A1	——	第一次圖面	HAW	2010.06.20

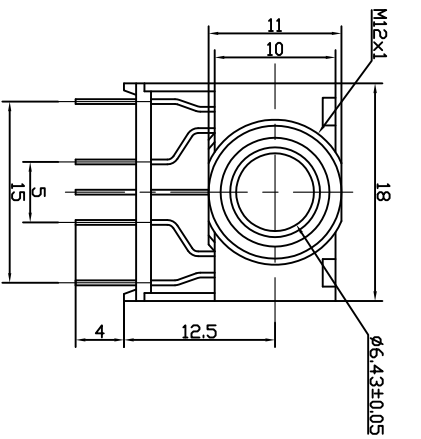

- SPECIFICATION**
- 1. Voltage Rating : DC50V
 - 2. Current Rating : 1A
 - 3. Contact resistance : 30mΩ Max
 - 4. Insulation resistance : 100MΩ Min. (DC500V) for one minute
 - 5. Dielectric withstand voltage : AC500V for 5 secs Min
 - 6. Operating temperature range -40~70℃

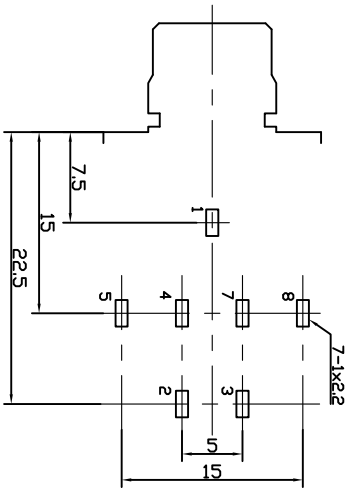

Recommend PCB layout
(Jack TOP View)
Tolerances: ±0.05
Recommend PCB Thickness: 1.6mm

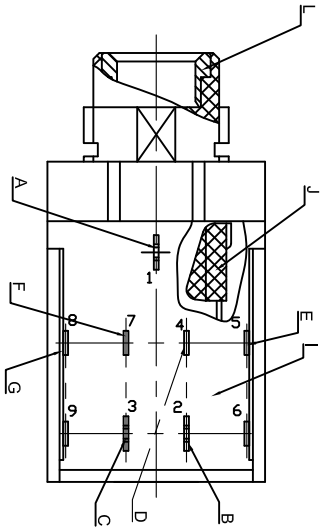

L	Metal Ring	1	CK-6.35-02-101	H59	N/Au	
K	Spring	1	CK-6.35-10-110	M65	Ni	
J	Insulator	2	CK-6.35-01-203	PDM	Black	
I	Cover board	1	CK-6.35-10-202	PC	Black	
H	Housing	1	CK-6.35-11-201	ABS	Black	
G	8#Pin	1	CK-6.35-10-108	QSn6.5-0.1-0.35T	Ag	
F	7#Pin	1	CK-6.35-10-107	H62-0.4Y	Ag	
E	5#Pin	1	CK-6.35-10-105	QSn6.5-0.1-0.35T	Ag	
D	4#Pin	1	CK-6.35-10-104	H62-0.4Y	Ag	
C	3#Pin	1	CK-6.35-10-103	QSn6.5-0.1-0.3T	Ag	
B	2#Pin	1	CK-6.35-10-102	QSn6.5-0.1-0.4Y	Ag	
A	1#Pin	1	CK-6.35-10-101	QSn6.5-0.1-0.3T	Ag	
N/A	PART NAME	QTY	PART NUMBER	MATERIAL	PLATING & COLOR	REMARK

大 廣 有 限 公 司 DA KOANG CO., LTD.									
TITLE:		2048							
SCALE:ND	UNIT: mm	PROJECTION				P/N		CK-6.35-11-7P	
SIZE: A3	PAGE:1	DF: 1	REV: A1	DWG.ND:		CK-6.35			
APPROVED BY			CHECKED BY		PREPARED BY				
YSG			ZY		HAW				
CUSTOMER COPY									
UNLESS OTHERWISE SPECIFIED TOLERANCES				DECIMALS: X ±0.5 X.X ±0.4 X.XX ±0.3			ANGLES: X ±2° X.X ±0.1°		