

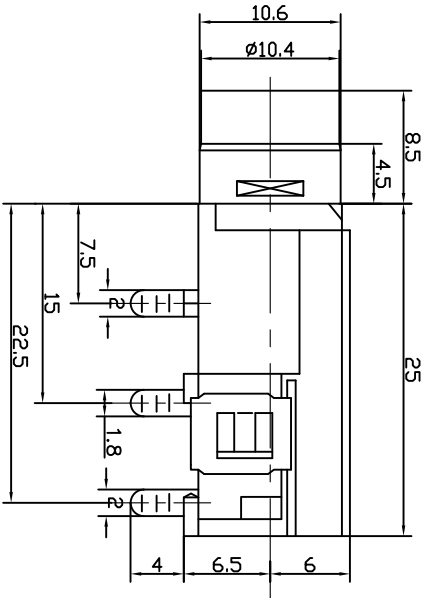
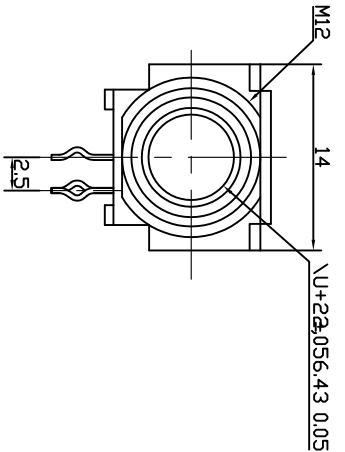



REV.	ECN NO	DESCRIPTION	REVISED	DATE
A1	——	新订图面	HAW	2010.06.20

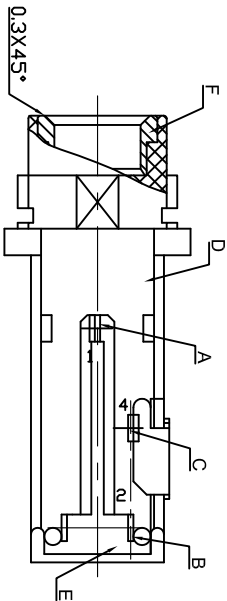

- SPECIFICATION**
1. Voltage Rating : DC50V
 2. Current Rating : 1A
 3. Contact resistance : 30mΩ Max
 4. Insulation resistance : 100MΩ Min. (DC500V) for one minute
 5. Dielectric withstand voltage : AC500V for 5 secs Min
 6. Operating temperature range : -40~70℃

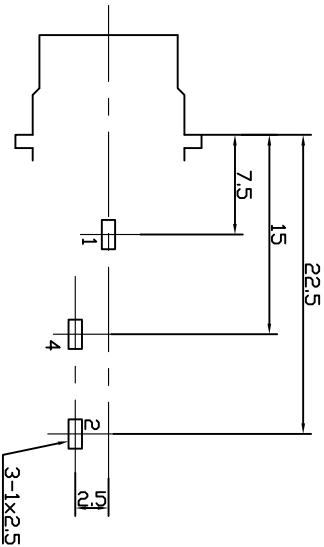

Schematic

Recommend PCB layout
(JACK TOP View)
Tolerances: ±0.05
Recommend PCB Thickness: 1.6mm

F	Metal Ring	1	CK-6.35-02-101	H59	GOLD	
E	Cover board	1	CK-6.35-17-202	ABS	Black	
D	Housing	1	CK-6.35-18-201	ABS	Black	
C	4#Pin	1	CK-6.35-17-103	H62-0.4Y	Ag	
B	2#Pin	1	CK-6.35-17-102	QSn6.5-0.1-0.4Y	Ag	
A	1#Pin	1	CK-6.35-17-101	H62-0.3Y	Ag	
NO.	PART NAME	Q'TY	PART NUMBER	MATERIAL	PLATING & COLOR	REMARK

UNLESS OTHERWISE SPECIFIED TOLERANCES		DECIMALS: X ±0.5 X.X ±0.4 X.XX ±0.3		ANGLES: X ±2° X.X ±0.1°	
SCALE:ND	UNIT: mm	PROJECTION: 1	REV: A1	DWG.ND: 139-01830003-A	CK-6.35
APPROVED BY	CHECKED BY	PREPARED BY	HAW		
YSG	ZY	HAW	CUSTOMER COPY		

大 廣 有 限 公 司 DA KOANG CO., LTD.

TITLE: 2164A