

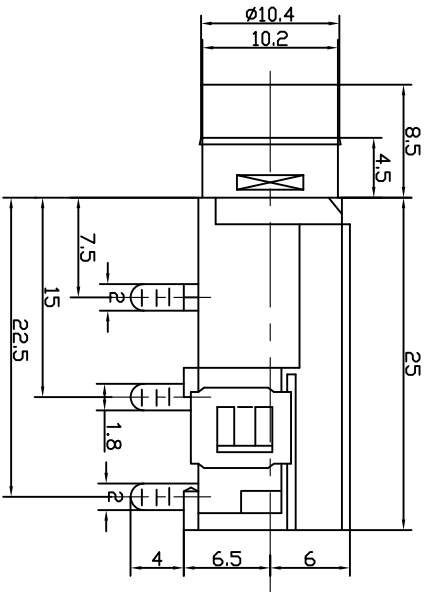
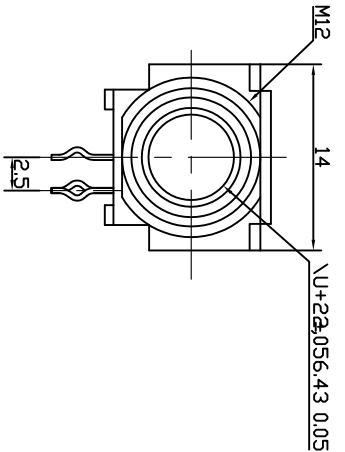



REV.	ECN NO	DESCRIPTION	REVISED	DATE
A1	—	新订图面	HAW	2010.06.20

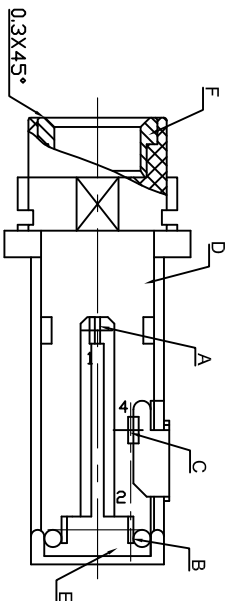

- SPECIFICATION**
- Voltage Rating : DC50V
 - Current Rating : 1A
 - Contact resistance : 30mΩ Max
 - Insulation resistance : 100MΩ Min. (DC500V) for one minute
 - Dielectric withstand voltage : AC500V for 5 secs Min
 - Operating temperature range -40~70℃

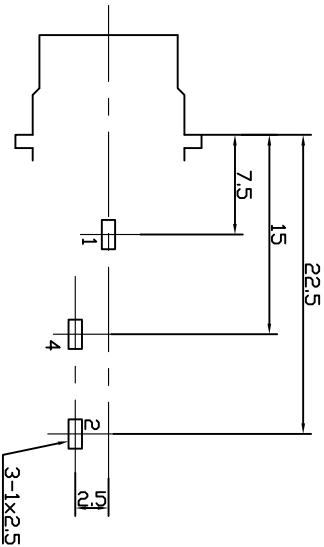

Schematic

Recommend PCB layout
(lack TOP View)
Tolerances: ±0.05
Recommend PCB Thickness: 1.6mm

F	Metal Ring	1	CK-6.35-02-101	H59	NICKEL	
E	Cover board	1	CK-6.35-17-202	ABS	Black	
D	Housing	1	CK-6.35-18-201	ABS 777D	Black	
C	4#Pin	1	CK-6.35-17-103	H62-0.4Y	Ag	
B	2#Pin	1	CK-6.35-17-102	QSn6.5-0.1-0.4Y	Ag	
A	1#Pin	1	CK-6.35-17-101	H62-0.3Y	Ag	
NO.	PART NAME	Q'TY	PART NUMBER	MATERIAL	PLATING & COLOR	REMARK

大 廣 有 限 公 司 DA KOANG CO., LTD.

TITLE:		2164	
SCALE:ND	UNIT: mm	PROJECTION	Φ≡P/N
SIZE: A3	PAGE:1 OF 1	REV: A1	DWG.ND: 139-01831009
APPROVED BY	CHECKED BY	PREPARED BY	
YSG	ZY	HAW	
CUSTOMER COPY			