
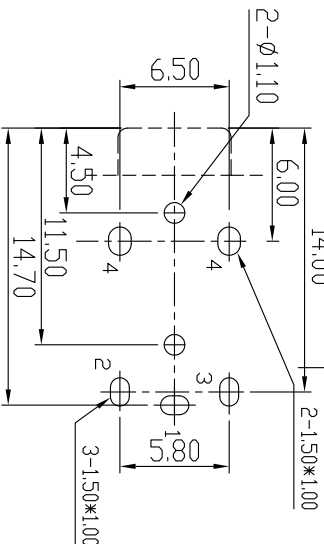

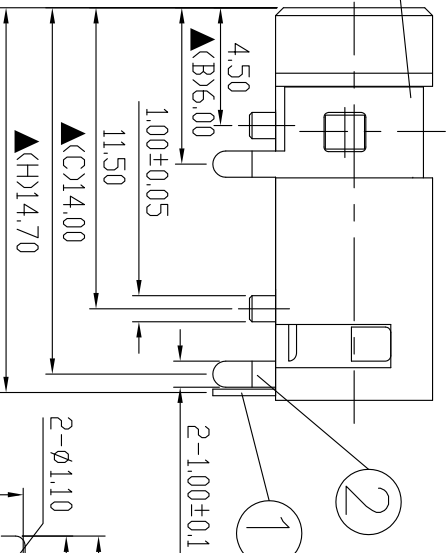
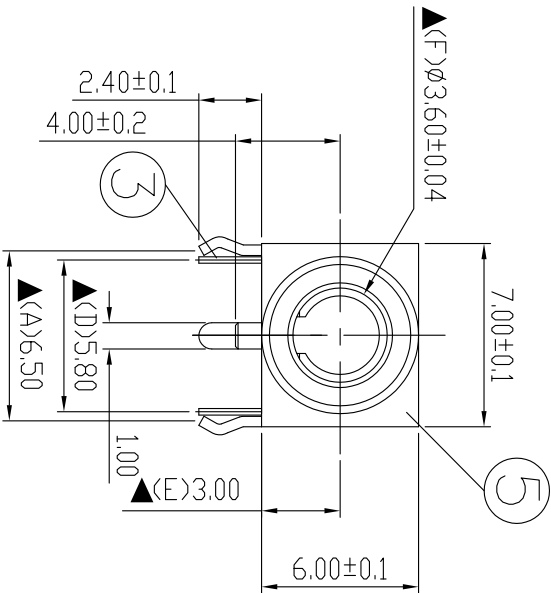
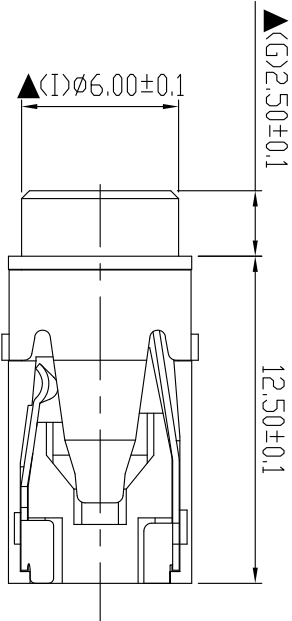


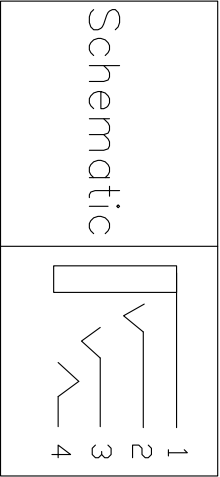

5	Housing	PBT	1	Black Color
4	Breck Terminal	0.4T Phosphor Bronze	1	Silver Plated
3	Tip Spring	0.25T Phosphor Bronze	1	Silver Plated
2	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
1	Earth Terminal	0.25T Phosphor Bronze	1	Silver Plated
NO	Description	Material	Q'TY	Finish

大 廣 有 限 公 司 DAKOANG CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
10.11.2012				

PART NAME : 3.5Ø PHONE JACK PART NUMBER: 2228A

VERSION: 5.0

TOLERANCE : $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : $30\text{m}\Omega$ max
Insulation Resistance : $100\text{M}\Omega$ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲ : The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考

Pin Hole Layout
(Jack Bottom View)