

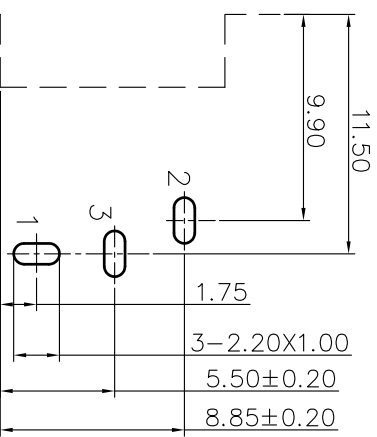
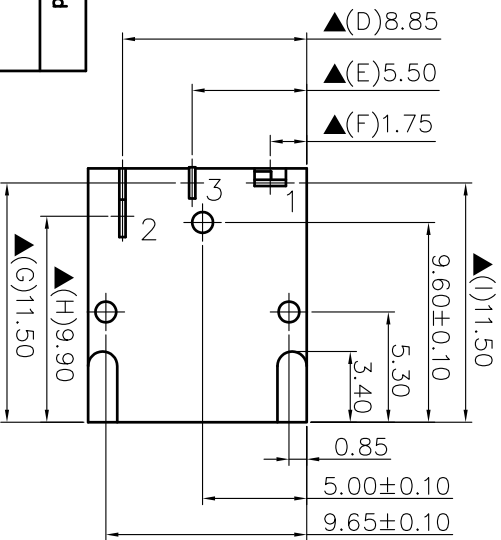
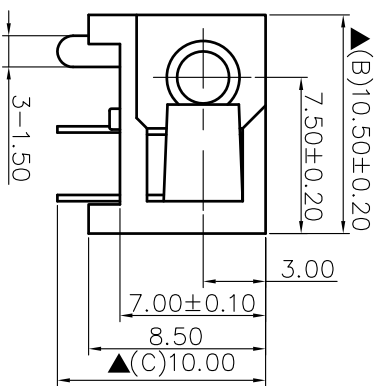
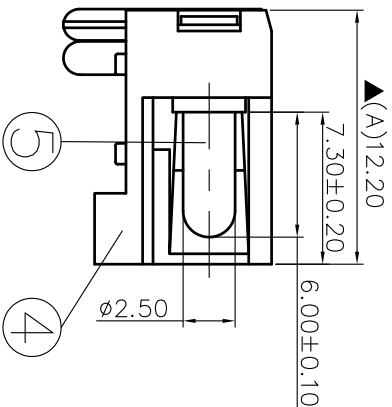
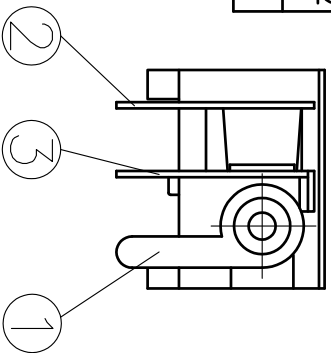


SCHEMATIC	
MOEL NO	C



5.	Pin(2.5φ)	Copper	1	Nickel Plated
4.	Housing	PBT	1	Black color
3.	Breck Terminal	0.4T Brass	1	Silver Plated
2.	Sleeve Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Pin Terminal	0.3T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

大 廣 有 限 公 司 DA KOANG CO., LTD.					
PART NAME :DC POWER JACK		PART NUMBER: 2053A			
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED		UNIT:mm		SCALE:1/1	
DATE		DWN	CHKD	APVD	MANAGER
11.07.2012					

PART NAME :DC POWER JACK PART NUMBER: 2053A



VERSION:7.0

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Current Rating : Max 5.0A , 24V DC
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲ : The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考