
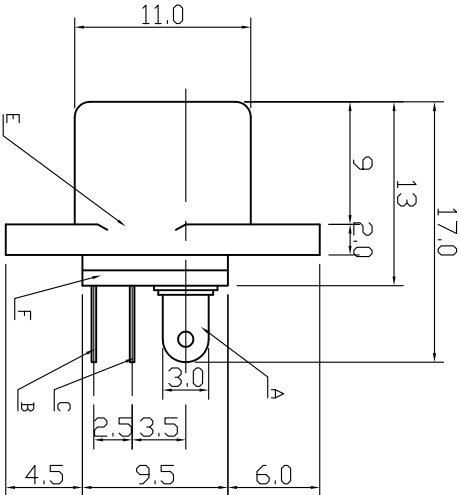


REV.	ECN	ND	DESCRIPTION	REVISED	DATE
A1	——		新訂圖面	LBD	2010.05.10

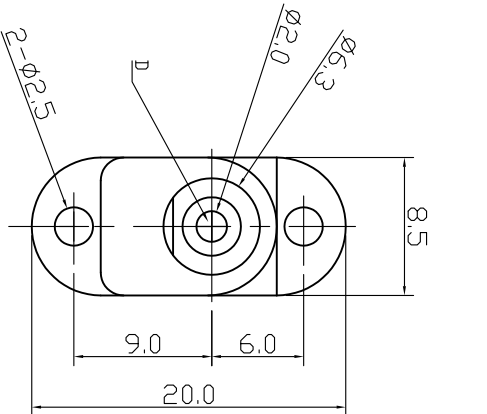

SPECIFICATION

1.Rating : DC 50V 1.5A;



2.Contact resistance: ≤30mΩ;

3.Insulation resistance: ≥100MΩ (DC500V);


4.Withstand voltage: 500VAC ;

5.Insertion and extraction force: 5-30N;

6.life test: 5,000 cycles;

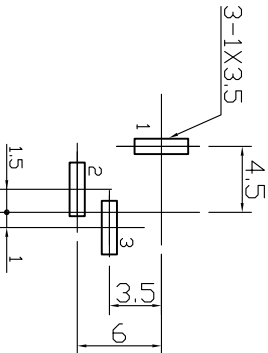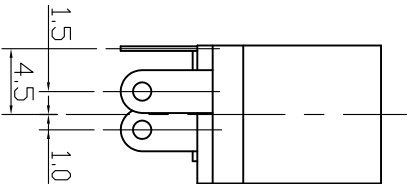

Recommend PCB layout
(Jack TOP View)
Tolerances: ±0.05
Recommend PCB Thickness: 1.6mm



Schematic

F	Cover Board	1	DC-007-202	ABS	Black	
E	House	1	DC-007-201	ABS	Black	
D	Mandril	1	DC-007-104	H59	CuSn	
C	3# Pin	1	DC-007-103	H62 T=0.3mm	CuSn	
B	Reed	1	DC-007-102	Mn65 T=0.25mm	鍍鎳	
A	1# Pin	1	DC-007-101	H62 T=0.3mm	CuSn	
ND	PART NAME	QTY	PART NUMBER	MATERIAL	PLATING & COLOR	Remark

UNLESS OTHERWISE SPECIFIED TOLERANCES		DECIMALS:		ANGLES:	
X ±0.5		X ±0.5		X ±2°	
X.X ±0.4		X.X ±0.4		X.X ±1°	
X.XX ±0.3		X.XX ±0.3			
SCALE:ND	UNIT: mm	PROJECTION: 第三角	P/N	DC-007	
SIZE: A3	PAGE:1 OF 1	REV: A1	DWG.ND:	DC-007	
APPROVED BY	CHECKED BY		PREPARED BY		
YSG	ZY		LBD		
CUSTOMER COPY					

大 廣 有 限 公 司 DA KOANG CO., LTD.

TITLE: 2054