

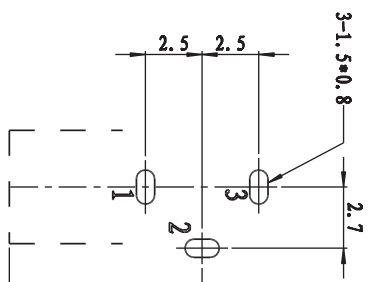
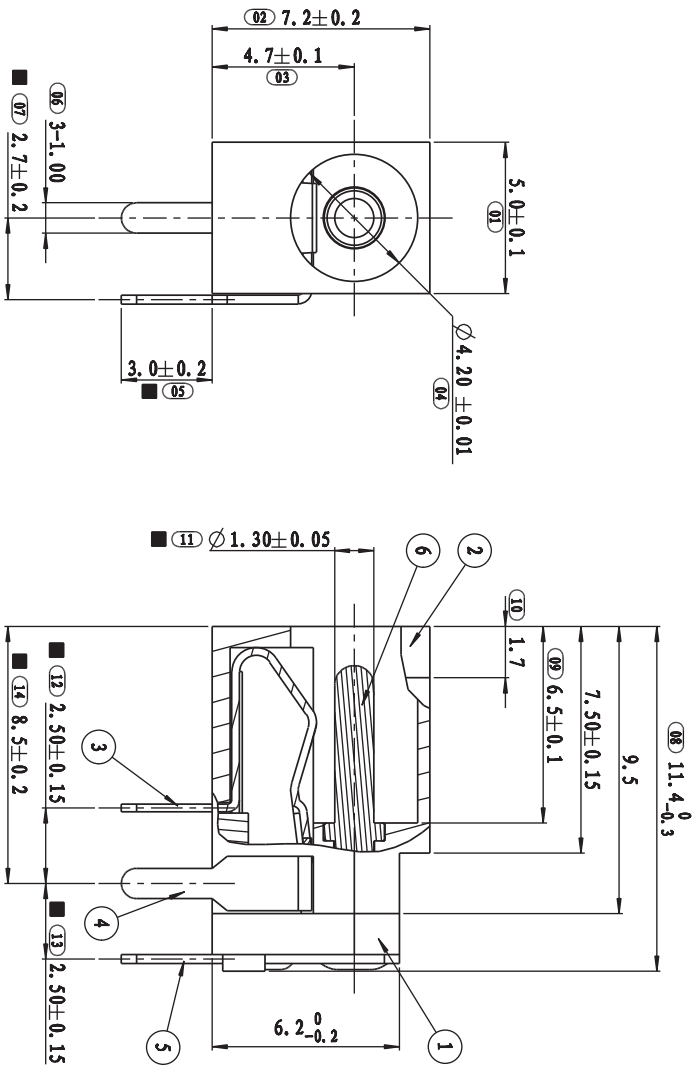


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	新订图纸	Zhouyan	2014. 03. 30



Recommend PCB layout
(Jack TOP View)

Schematic

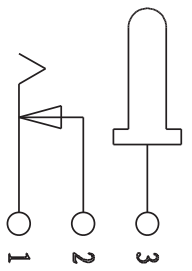

比例 2:1

SPECIFICATION:

1. Voltage Rating : DC16V
2. Current Rating : 3.5A
3. Contact resistance : 50mΩ Max.
4. Insulation resistance : 100MΩ Min.
DC500V) for 1 secs
5. Dielectric withstand voltage :
AC500V for 1 minute Min.
6. Insertion Force : 1kgf MAX
7. Extraction Force : 3kgf
8. Life test : 5000 cycles
9. Operating temperature range -25~85℃
10. Solder heat resistance : wave soldering
260° for 3 secs

UNLESS OTHERWISE
SPECIFIED TOLERANCES

大 廣 有 限 公 司 DA KOANG CO., LTD.

DECIMALS		ANGLES		CUSTOMER COPY			
X	: ±0.50	X	: ±3°	NAME	PART NO.	UNIT	MM
X.X	: ±0.30	X.X	: ±2°	DWN	738-00213001	REV	A
X.XX	: ±0.10			CHD		SHBET	1/1
				APVD		SIZE	---

DIMENSION CLASSIFICATION
■ : CRITICAL
○ : CHECK