

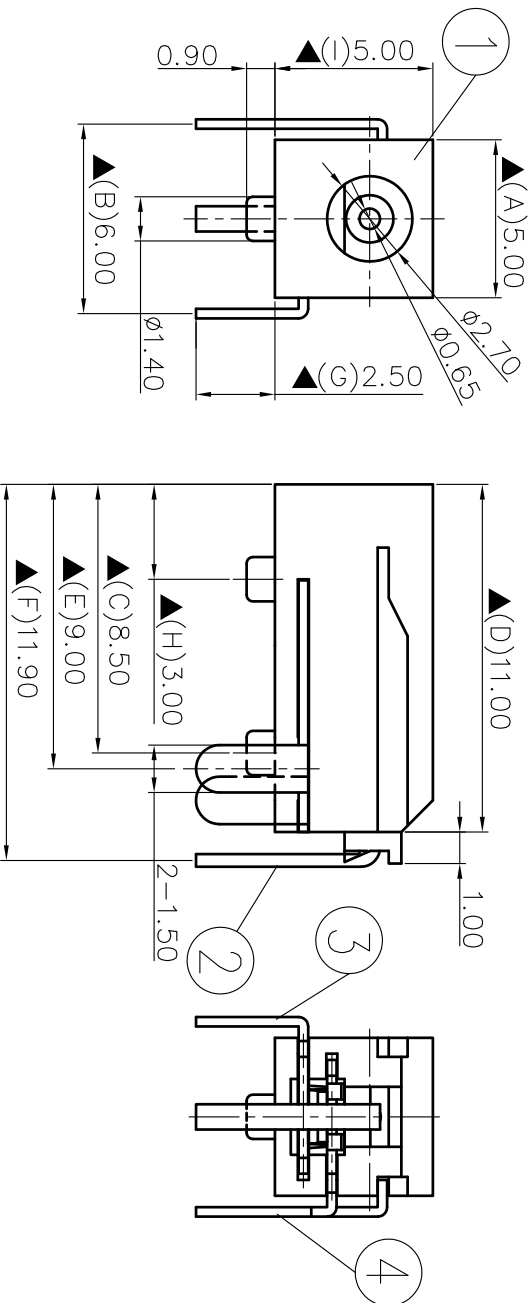


SCHEMATIC	
CODE NO.	C

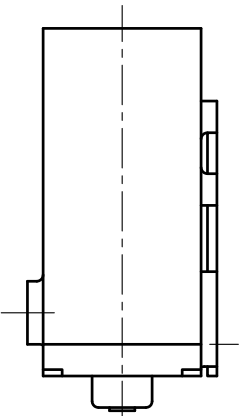

Pin Hole Layout
(Jack Bottom View)

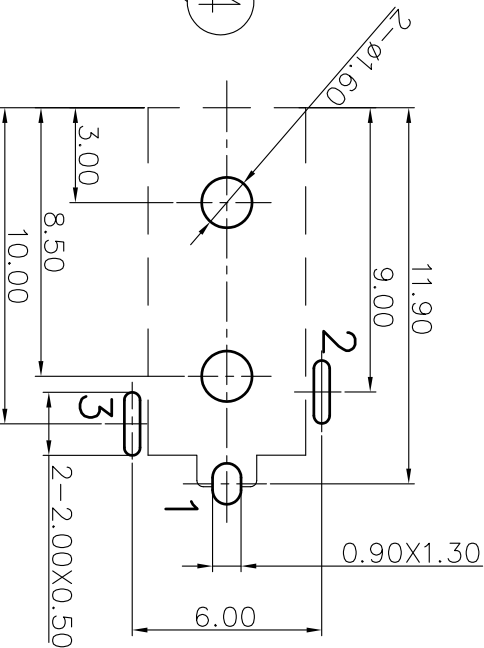

4.	Break Terminal	0.3T Bronze	1	Silver Plated
3.	Pin Spring	0.3T Phosphor Bronze	1	Silver Plated
2.	Pin(φ0.65)	Phosphor Bronze	1	Silver Plated
1.	Housing	PBT	1	Black Color
NO.	Description	Material	Q'TY	Finish

大 廣 有 限 公 司 DAKOANG CO., LTD.				
PART NAME : DC POWER JACK		PART NUMBER: 2169A		
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED		UNIT:mm	SCALE:1/1	VERSION:6.0
		DATE	DWN	CHKD
		11.16.2012		
		APVD	MANAGER	

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Current Rating : Max 5.0A , 24VDC
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲ : The Most Important Dimension

RoHS Compliant	For Reference 僅供參考
-------------------	-----------------------