

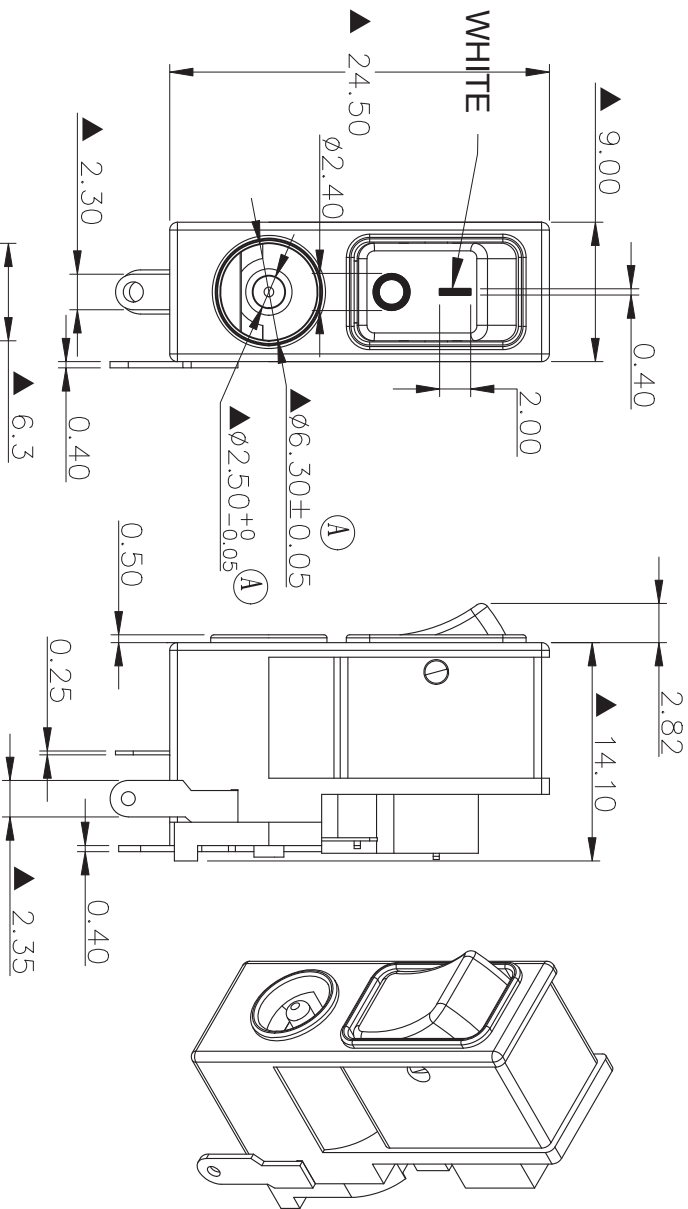


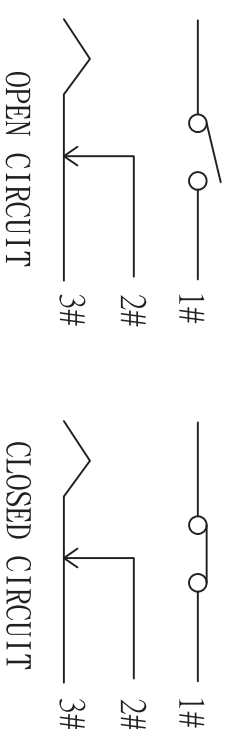

SPECIFICATION

- 1、Electrical rating : DC 12V 3.8A
- 2、Contact resistance : < 20mΩ(initial)
- 3、Insulation resistance : > 1000MΩ(500VDC between open contacts)
- 4、Dielectric strength : >1500V 1 minute
- 5、Electrical life : 6000 cycles
- 6、Temperature rise at the terminal : Max.30℃
- 7、Solder ability of terminal : Max350℃,3S(no pressure may be placed in the terminals when soldering by hand)
- 8、Any Cd Pb Hg etc and it's compounds is not include in this product

PATENT NO. : M376887

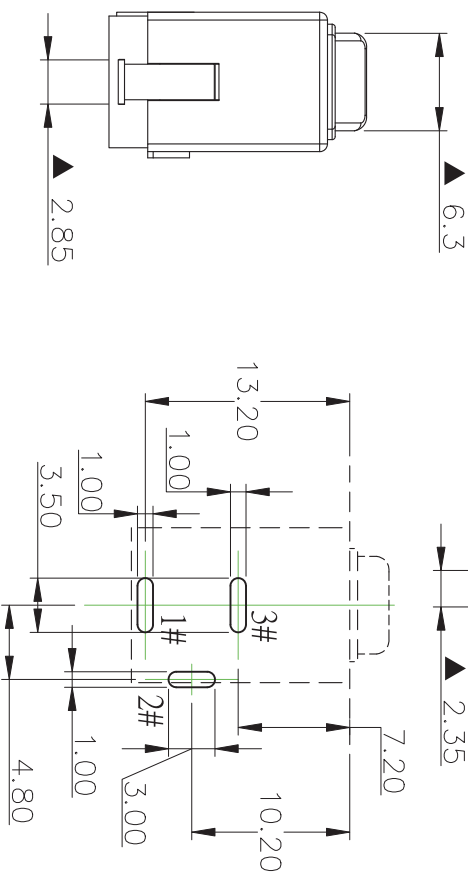

SCHEMATIC

大 廣 有 限 公 司 DA KOANG CO., LTD.

P.C.B LAYOUT
BOTTOM VIEW

	符號	原尺寸	修改後尺寸	變更日期	SCALE(比例): 2:1				
1	Ⓐ	加註PIN與孔徑尺寸公差		SEP-23-2014	TOLERANCE (公差): 0.00 mm ± 0.25mm 0.0 mm ± 0.40mm ANGULAR: ± 5° FILE NAME : RJ0006				
2	Ⓑ				TITLE 圖名				
3	Ⓒ				DWG NO. 圖號		DC POWER JACK WITH SWITCHES		SIZE 圖紙
4	Ⓓ				REV. 版本		DATE 日期	OCT - 12 - 2011	UNIT 單位
5	Ⓔ				CHECKED BY 審核		RICHARD		SHEET 張數
					DRAWN BY 製圖		IRENE		1 of 1