



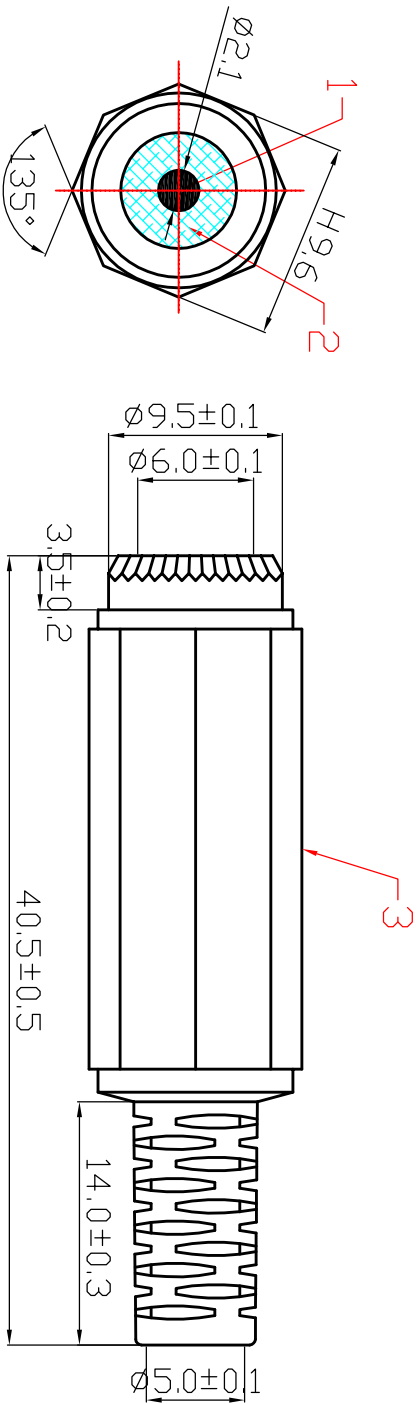

ELECTRICAL CHARACTERISTIC	
①	CONTACT RESISTANCE: $\leq 30m\Omega$
②	INSULATION RESISTANCE: $\geq 2M\Omega$
③	WITHSTAND VOLTAGE: DC100V
④	CURRENT RATING: 0.5A/DC100V
⑤	OPERATING TEMPERATURE: $-30^{\circ}C \sim 60^{\circ}C$

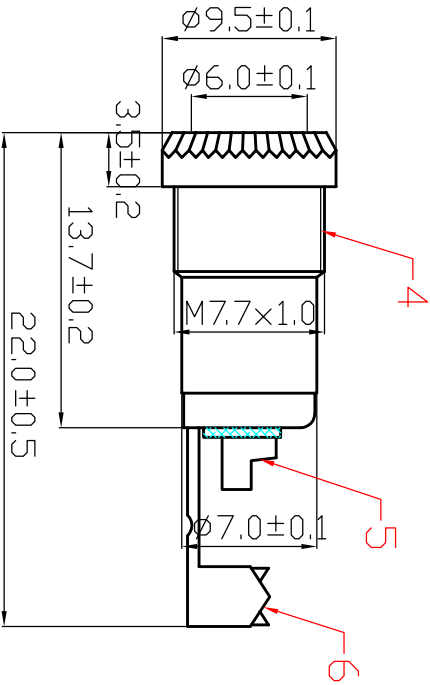

2	DIELECTRIC	POM	TOLERANCE		SIGNATURES		DATE	大 廣 有 限 公 司 DA KOANG CO., LTD.	
1	PIN	ZINC	0 - 10 10 - 99 100 - 999 1000 - 9999 10000 - 99999	±0.05 ±0.5 ±10.0 ±100.00 ±1000.00	DRAFT: YangYongRui CHECKED:HuGongXue	05.12.29			
ITEM	DESIGNATION	MATERIAL							
REV	PART NO.& SAMPLE NO.	DATE	BY	APPROVAL:					
A	2083			SHEET			SCALE		
B				OF	1:1	mm	∅	TITLE	DC Jack W/Plastic Handle
					CUSTOMER				