
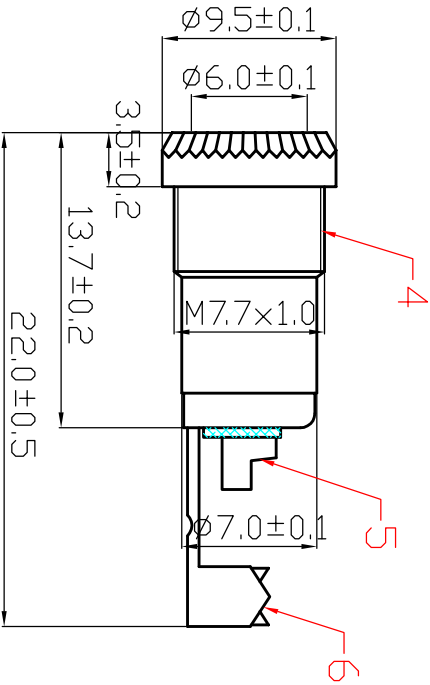


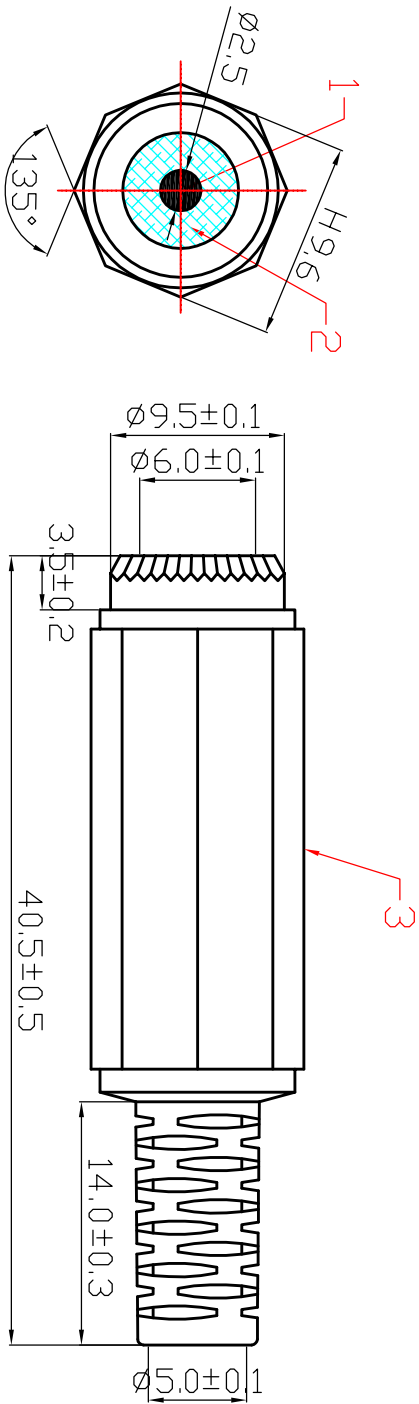

ELECTRICAL CHARACTERISTIC

①	CONTACT RESISTANCE: $\leq 30m\Omega$	
②	INSULATION RESISTANCE: $\geq 2M\Omega$	
③	WITHSTAND VOLTAGE: DC100V	
④	CURRENT RATING: 0.5A/DC100V	
⑤	OPERATING TEMPERATURE: $-30^{\circ}C \sim 60^{\circ}C$	
6	CRIMPING PATCH	IRON
5	SOLDERING PATCH	ZINC
4	BODY	ZINC
3	PLASTIC HANDLE	PVC
2	DIELECTRIC	POM
1	PIN	ZINC
ITEM	DESIGNATION	MATERIAL
REV	PART NO.& SAMPLE NO.	DATE BY
A	2083A	
B		

TOLERANCE		SIGNATURES		DATE	大 廣 有 限 公 司 DA KOANG CO., LTD.	
0 - 10	±0.05	DRAFT: YangYongRui CHECKEO:HuGongXue		05.12.29		
10 - 99	±0.5					
100 - 999	±10.0					
1000 - 9999	±100.00	APPROVAL:				
10000 - 99999	±1000.00					
						
SHEET	SCALE	UNIT	REV			
OF	1:1	mm	∅	CUSTOMER		
TITLE				DC Jack W/Plastic Handle		
				2.5 mm		