

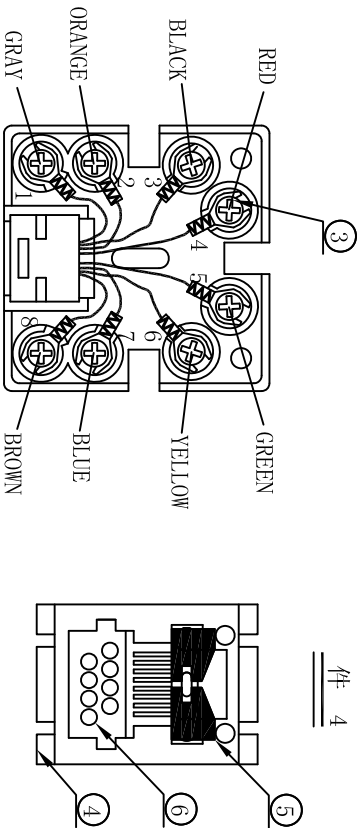
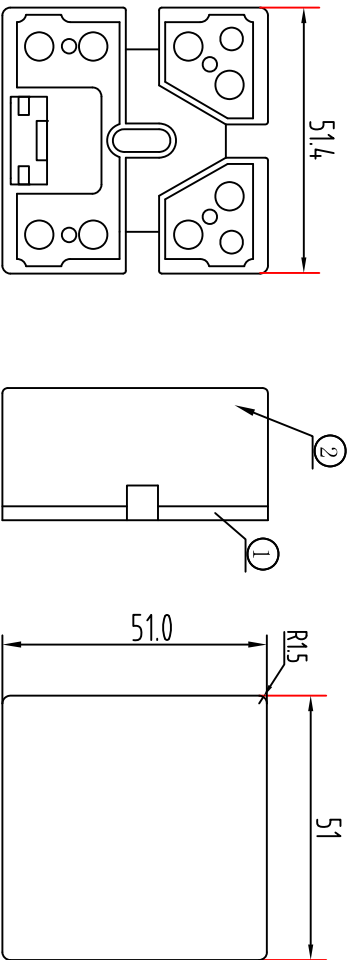


REVISION RECORD MODIFICATIONS	DATE	REV.
	2011/01/19	A/0
NEW		



WIRING DIAGRAM

- ⑩ ⑨ ⑧ ⑦
- A: 1. 11.3±0.1 COLOR: BLACK、BLUE
2. 13.8±0.1 COLOR: YELLOW、ORANGE
3. 14.3±0.1 COLOR: GRAY、GREEN
4. 16.3±0.1 COLOR: BROWN、RED

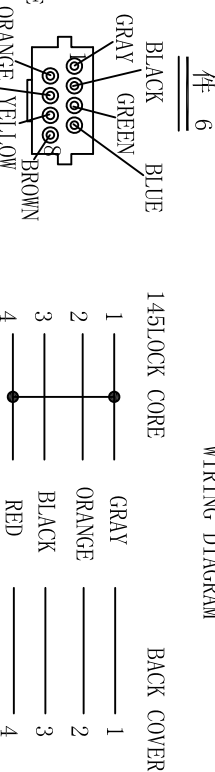

MATERIAL LIST:

⑫	VALVE LAG	SPECIFICATINO:40*60*0.03MM	1	
⑪	SCREW (2)	A MODEL M3.5*20 NICKELAGE	1	
⑩	GOLD SILK	PLATE GL0D 3U"	8	
⑨	ADAPTER SLEEVE	CU	8	
⑧	LINE	OD:0.98 COLOR:GREY、ORANGE、BLACK、RED、GREEN、YELLOW、BLUE、BROWN;	8	
⑦	"Y" TERMINAL	PHOSPHOR BRONZE	8	
⑥	145 LOCK CORE	ABS COLOR:IVORY 8P8C	1	
⑤	GOLD PLAQUE	PLATE GL0D 3U"	2	
④	KD51 BRACKET	ABS COLOR:IVORY	1	
③	SCREW (1)	B MODEL M3*5 NICKELAGE	8	
②	FRONT COVER	ABS (UL94V-0) COLOR:IVORY	1	
①	BACK COVER	ABS (UL94V-0) COLOR:IVORY	1	
NO.	MAT. NAME	DESCRIPTION	QTY	REMARK

- NOTES:
1. Electrical testing:100%
 2. Visual inspection:100%
 3. RoHS Compliant

大 廣 有 限 公 司 DA KOANG CO., LTD.			
DRAW NO.	PRODUCT NAME	2177B	
CUSTOMER	VIEW		TOLERANCE X.X ±1.00 X.X ±0.50
ITEM NO.			
DRAWNBY	CHECKBY	APPOBY	UNTT
		HandongXia	Blatt-Nr
			1/1