


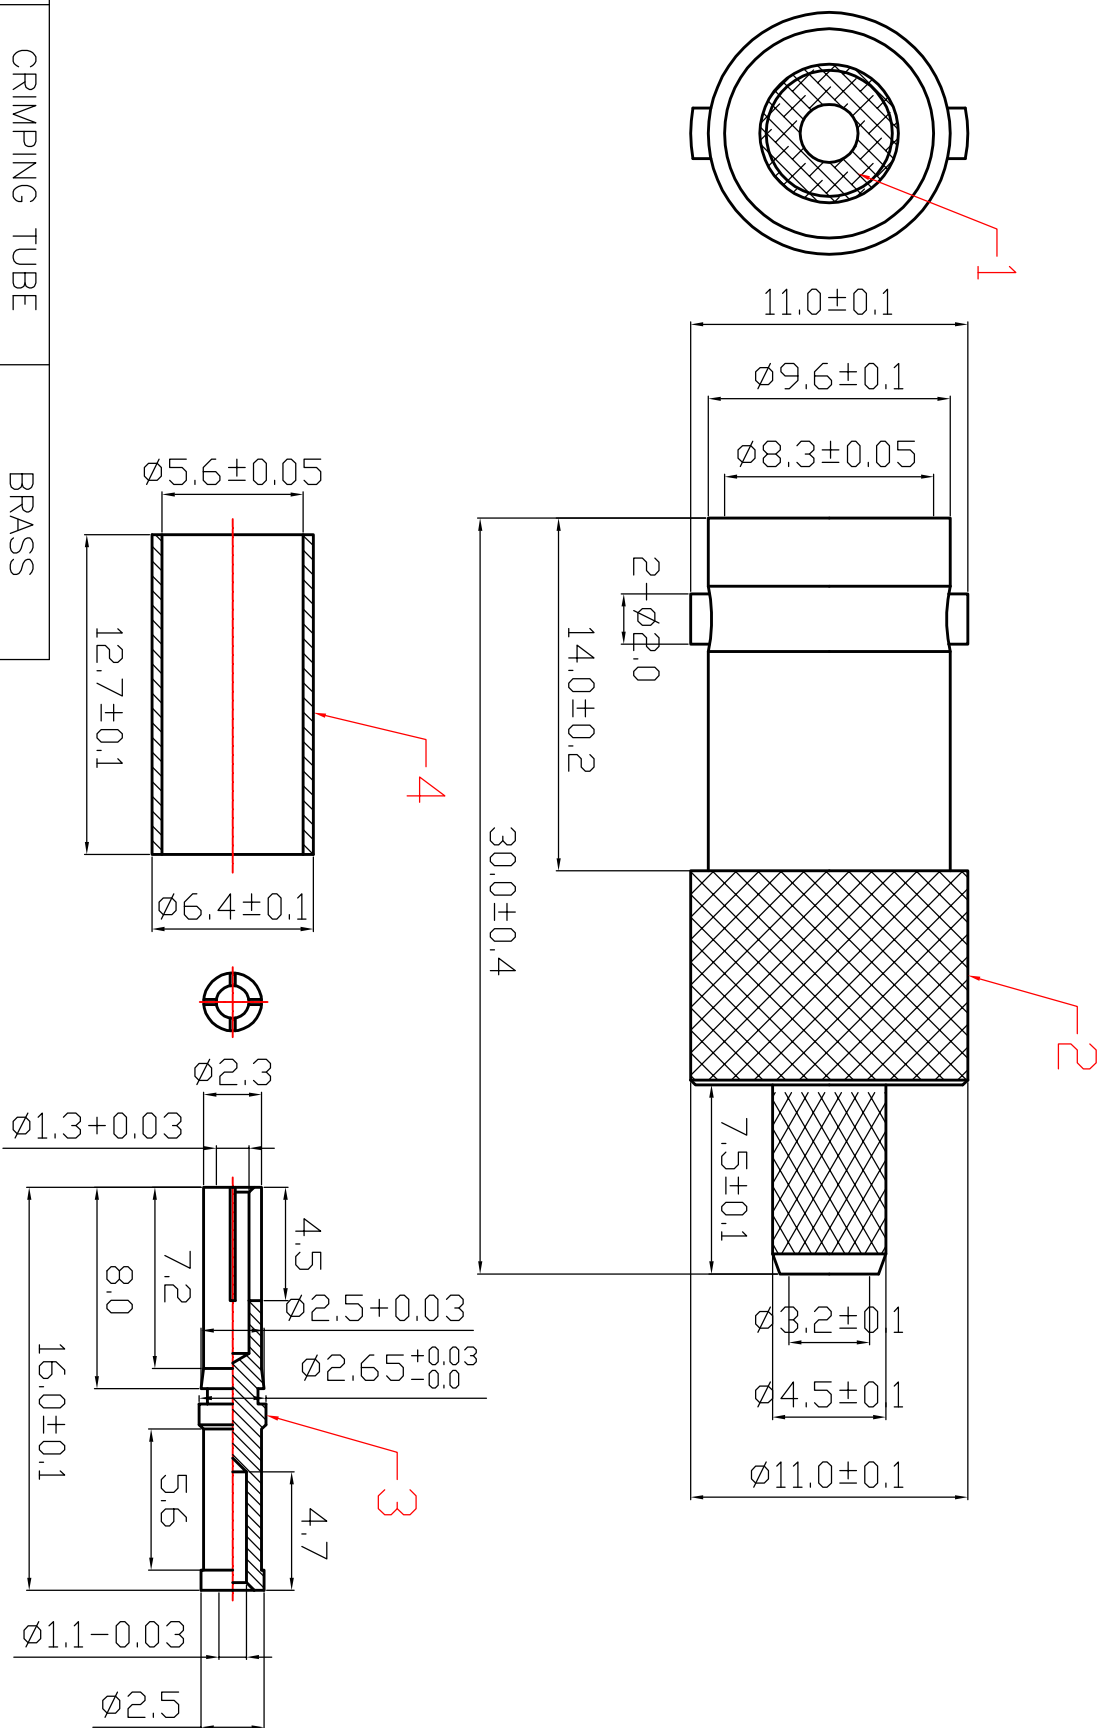

4	CRIMPING TUBE	BRASS	TOLERANCE	SIGNATURES	DATE	大 廣 有 限 公 司 DA KOANG CO., LTD.			
3	PIN	BRASS							
2	BODY	BRASS							
1	DIELECTRIC	POM	0 - 10 10 - 99 100 - 999 1000 - 9999 10000 - 99999 ±0.05 ±0.5 ±10.0 ±100.00 ±1000.00	DRAFT: YangYongRui CHECKED: HuGongXue	23-03-2016				
ITEM	DESIGNATION	MATERIAL							
REV	PART NO. & SAMPLE NO.	DATE	BY						TITLE BNC Female Crimp Type (RG-58U)
A	2112A								
B									
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						
			Ø						
			10.0 ± 0.1						