



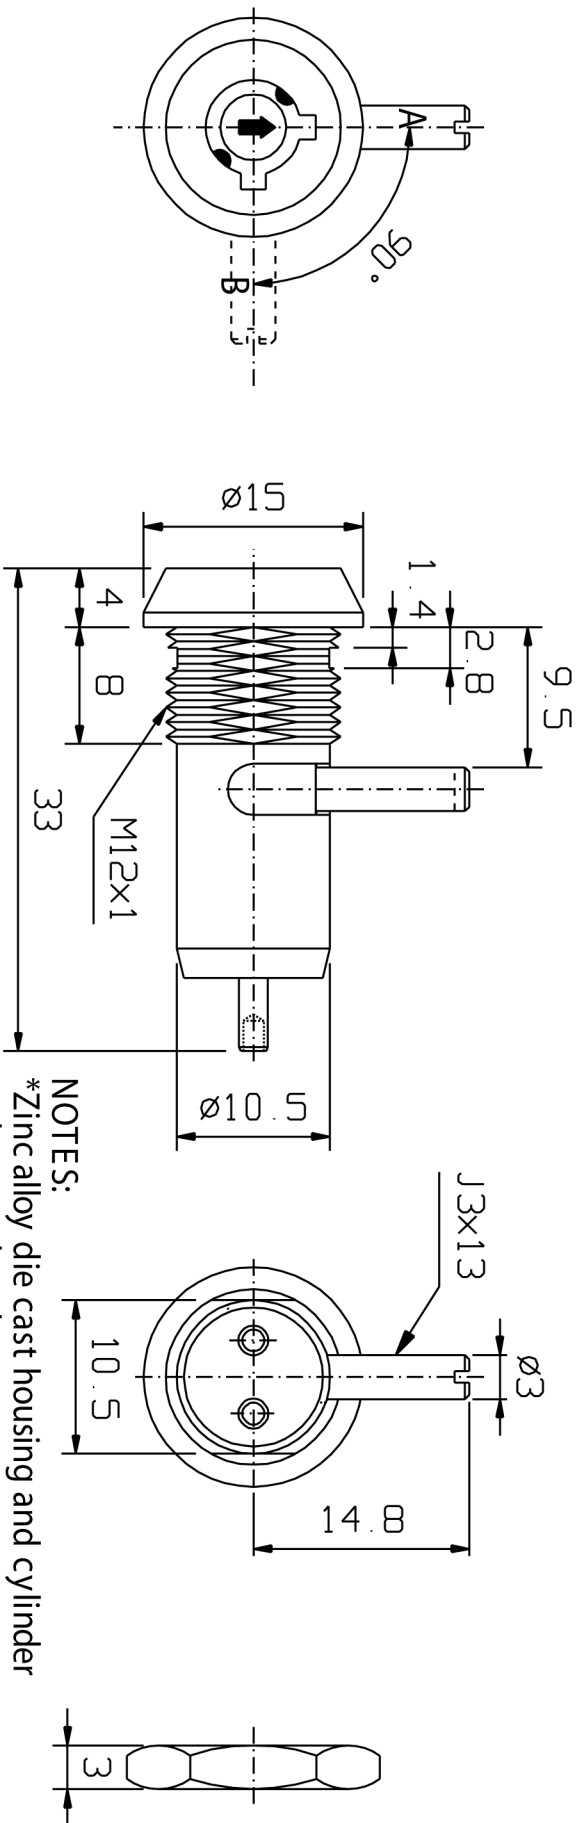

NOTES:

- *Zinc alloy die cast housing and cylinder ,chrome plated.
- *Zinc alloy keys,chrome plated.
- *Silver plated contacts and terminals.
- *2 Positions (off-on).
- *5058A is a Dual-Functioned Key Lock Switch.
- *Contact Rating:1A 125VAC, 0.5A 250VAC.

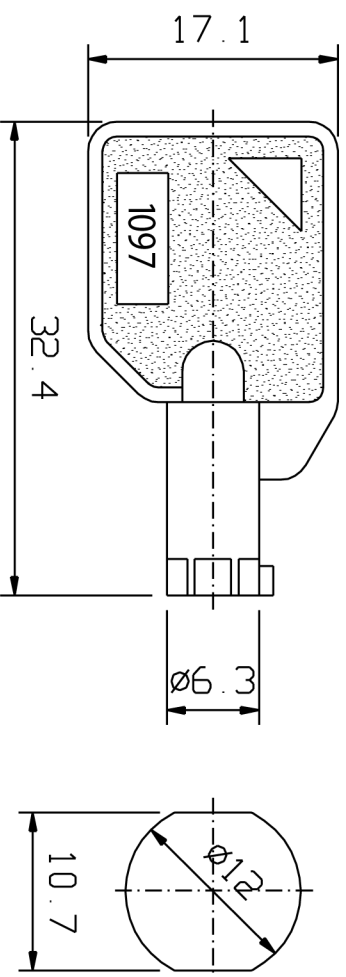

Recommended hole size

REV.	NO.	COORDINATES	WAS	NEW	DATE	BY	REV.	A	WT.	g	DATE	03.24.06
1	2	3	4	5	6	7	8					