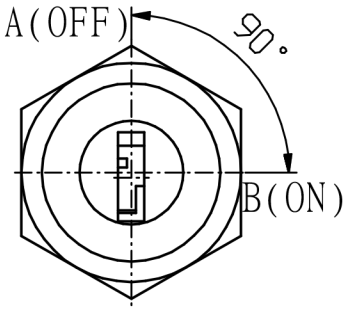

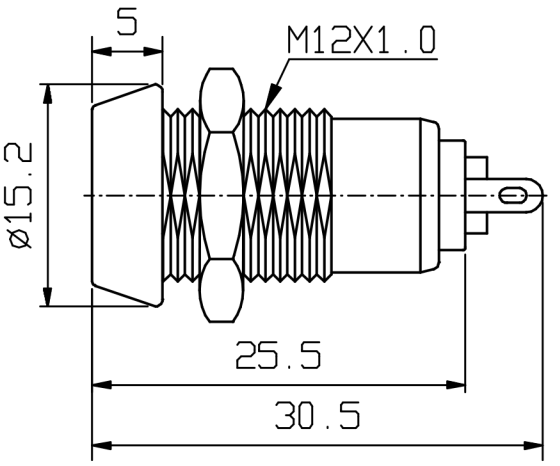

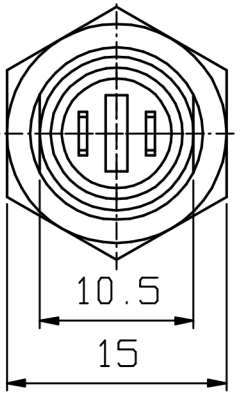

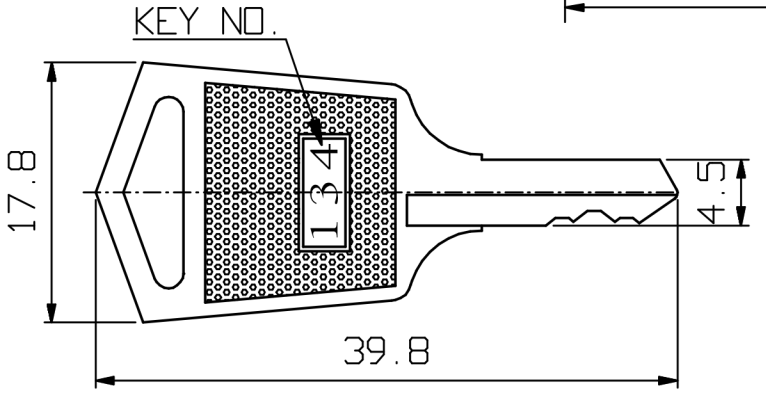



Recommended hole size

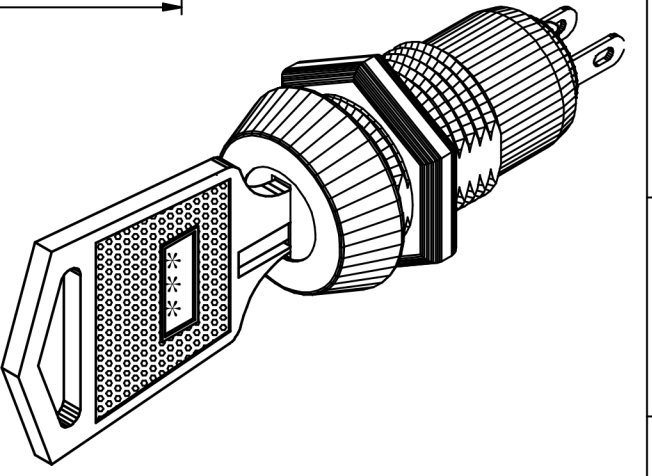

NOTES:
*Zinc alloy die cast housing with bright stainless steel bezel.
*Brass keys,nickel plated.
*Silver plated contacts and terminals.
*2 Positions (off-on).
*S109B Key may be withdrawn in one or both positions.
*Contact Rating :0.2A 125VAC.

DESCRIPTION	KEYLOCK SWITCH				
PART NO.	5055A				
MATERIAL					
NOTE					
APPROVED BY		CHECKED BY		DRAWN BY	
TOLERANCES	UNIT mm			SCALE	5:1
>0 ±0.1 >6 ±0.2 >30 ±0.3 >120 ±0.5 >315 ±0.8 >1000 ±1.2	大廣有限公司 DA KOANG CO., LTD.				

REV. NO.	COORDINATES	WAS	NEW	DATE	BY	REV.	A	WT.	g	DATE	03.23.06