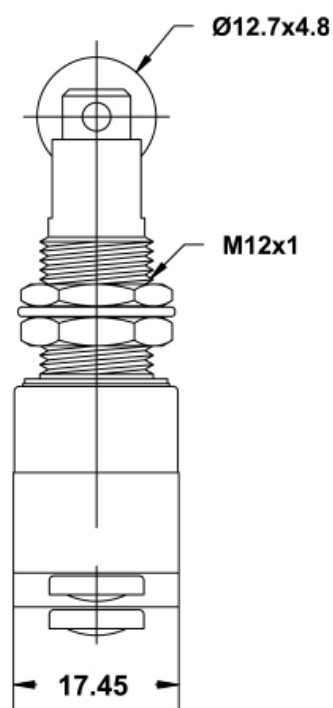
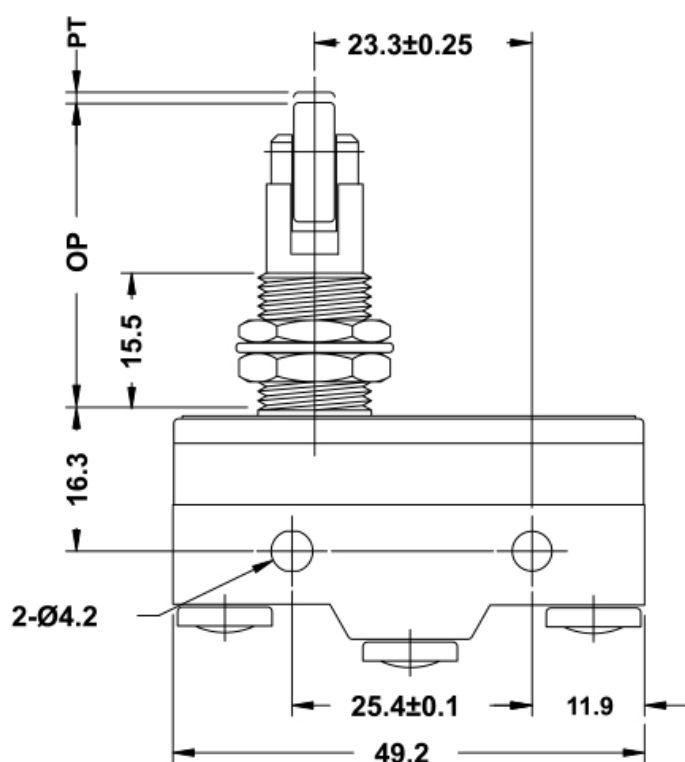


3-M4x5.5
Terminal screw
(with internal gear washer)

Specifications:

1. Rating : 15A 125VAC/250VAC
2. Contact Resistance : 15mΩ max. (initial)
3. Insulation Resistance : 100MΩ min. (at 500V DC)
4. Dielectric Strength : Between terminals of same polarity AC 1000V (50/60Hz for 1minute)
5. Electrically Life : 100,000 operations min.
6. Mechanically Life : 1,000,000 operations min.

大 廣 有 限 公 司 DA KOANG CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
------	-----	------	------	---------

12.08.2005				
------------	--	--	--	--

PART NAME: MICRO SWITCH

PART NUMBER: 5103B

VERSION: 2.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: