
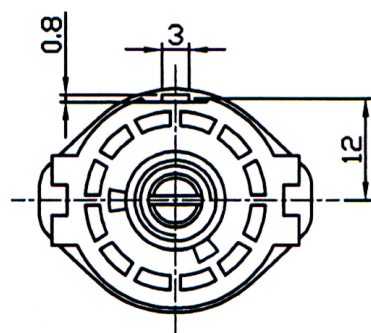
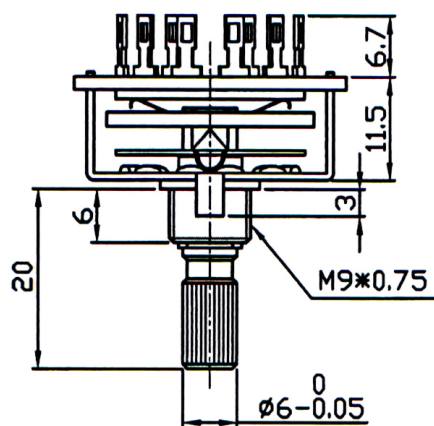


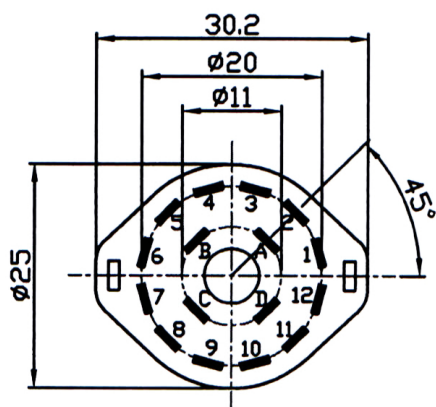

SPECIFICATIONS:

Rated power(W) : DC 30V 0.5 (AC 125V 0.3A)

Contact resistance : 25mΩ max.

Insulation resistance : DC 500V 100MΩ min

Withstand voltage : 500V 1 minute

Torque : 1.5 ± 1kg

Life cycles : 10,000 cycles

COMPOSITION

Model	Sections	Poles	Positions
5060A	1	4	3

大 廣 有 限 公 司 DA KOANG CO., LTD.

DATE

DWN

CHKD

APVD

MANAGER

12.08.2005

PART NAME: ROTARY SWITCG

PART NUMBER:5060A

VERSION:2.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE: