


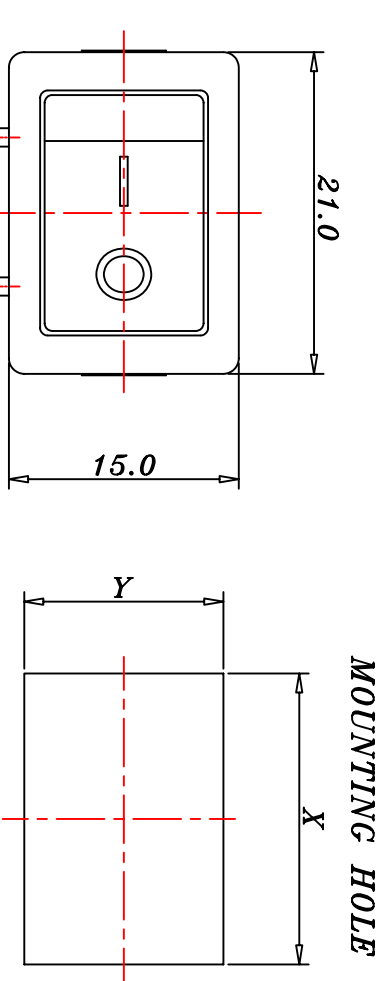


MOUNTING HOLE


Contact Ratings:

5A250VAC 10A125VAC ()
6A (1) 250V $\sim$ 185 () () ()
10A/10A250V $\sim$ ()
8A250VAC 10A125VAC () ()
Initial Contact Resistance: 50 Milliohms Max.
Insulation Resistance: 500 Megohms Min.
Withstand Voltage: 2,000VAC-1 Minute.
Life Expectancy: Over 10,000 Cycle.
Operating: 600 $\pm$ 200gf.

Panel Thickness	A=19.15 Dim. X	Dim. Y
0.75 $\sim$ 1.25	19.2/19.1	13.0/12.9
1.25 $\sim$ 2.0	19.4/19.3	13.0/12.9
2.0 $\sim$ 3.0	19.8/19.7	13.0/12.9

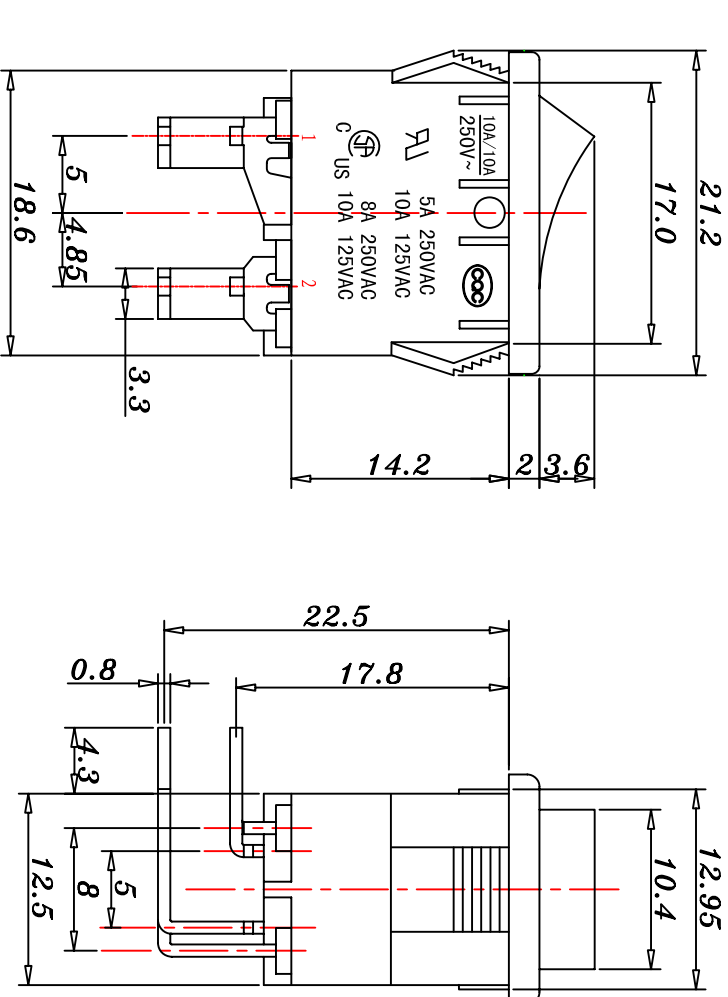

FILE NO:	Marking	40027403	
E105856(S)		CQC03002004733	
67824-14		LR112904-6	
313239-01			
500880			
P05203636			
21498			



大 廣 有 限 公 司 DA KOANG CO., L.TD.				DES		R130 SERIES	
				DRW		ROCKER SWITCH	
TOL				DESIGN		DWG NO.	
				CHECKED		MODEL	
SCALE				UNIT		VERSION	
PROJ				TOTAL		DATE	