

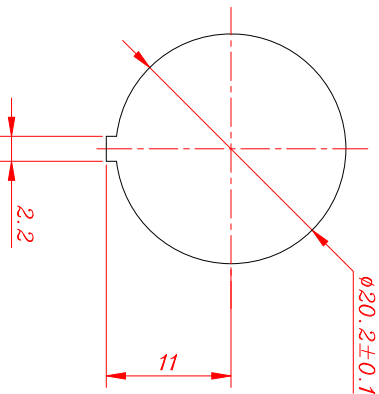
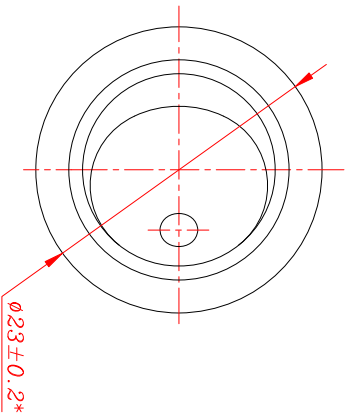


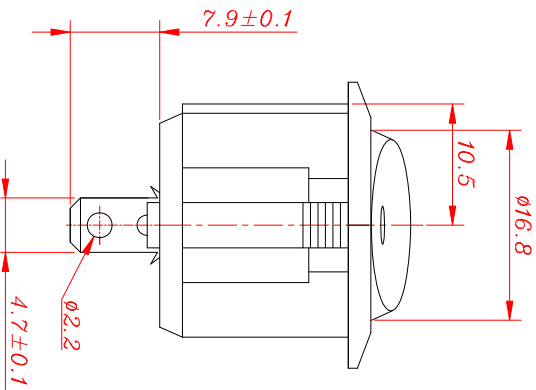

MOUNTING HOLE

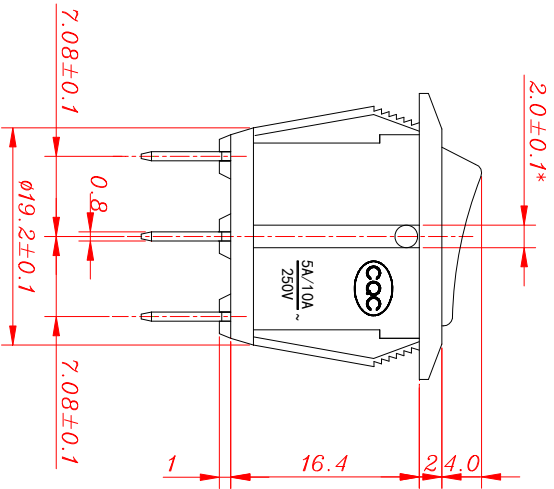

SPECIFICATION

CONTACT RATING

:5A250VAC 10A125VAC ()
10A 250V/125V ()
6(1) A250V ~ T85/55 () () ()
5A/2X250V ~ ()

INITIAL CONTACT RESISTANCE:50M111ohms Max.
INSULATION RESISTANCE :500 Megohms Min 500VDC.
WITHSTAND VOLTAGE :1,000 VAC-1 Minute.
LIFE EXPECTANCY :10,000 Cycles.
OPERATING FORCE :400±200 gf.

MODEL NO	SCHEMATIC
5169A Series	

Safety Certificate	FILE NO:
	E105856
	LR112904-6
	40027238
	CQC03002004731

Safety Certificate	FILE NO:
	313271-01
	9441059
	P05203712
	21533

大 廣 有 限 公 司 DA KOANG CO., LTD.							DES		BR SERIES	
TOL	>0.3 ~ 6 ± 0.15 >30 ±0.3 ANG ±1°		DRW	F. J. R	05/03/11	TITLE	ROCKER SWITCH			
			DESIGN	F. J. R	05/03/11	DWG NO.	PNA-000169			
			CHECKED			MODEL	5169A Series			
SCALE	1 : 5 : 1	UNIT	mm	APPROVED		VERSION	A1			
PROJ			TOTAL	1	PAGE	1	DATE			