
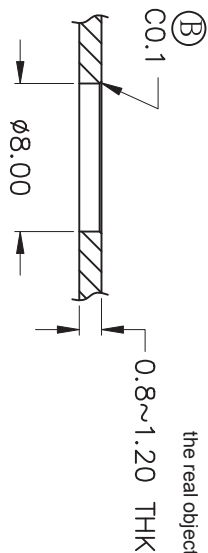



本公司智慧財產，未經同意不得複製
DAILYWELL copyright, may not be used
without permission from DAILYWELL

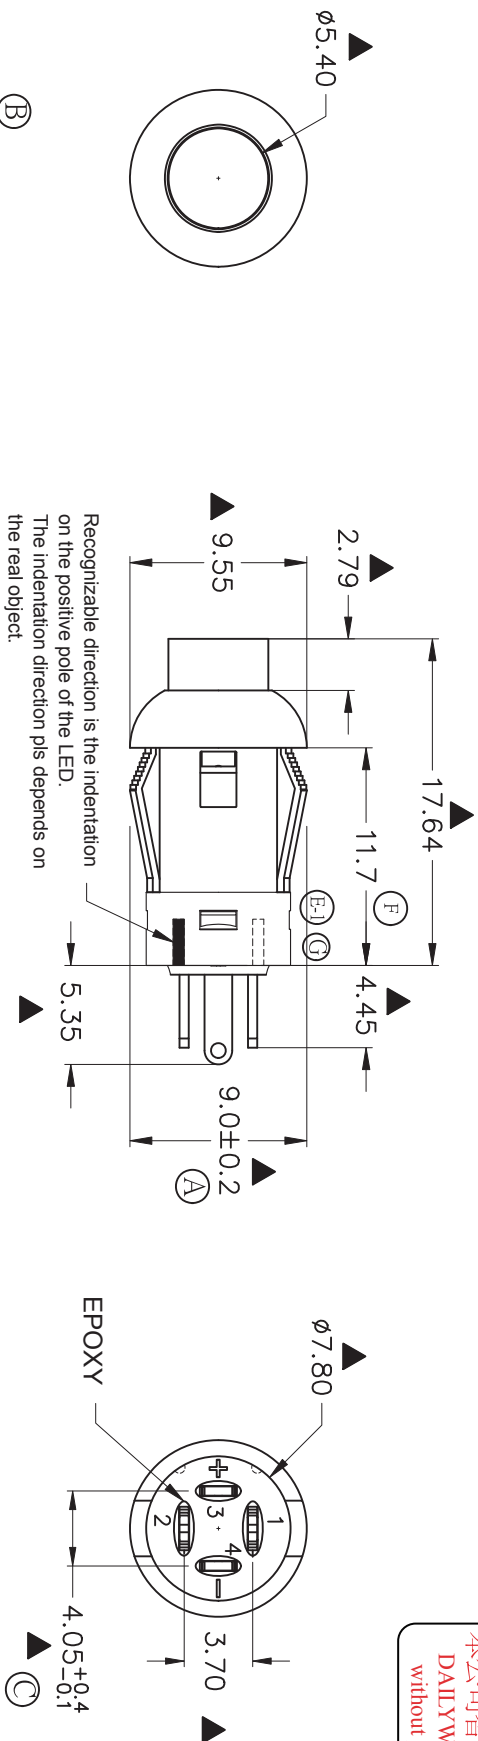


PANEL MOUNTING

Specifications

Pole-position : Momentary Type, SPST with LED
Contact rating : 30V DC,0.1A
Contact resistance : 50 mΩ max. 1.5V DC ; 100mA, by Method of Voltage DROP
Insulation resistance : 100 MΩ min. 500V DC
Dielectric strength : 500V AC for 1 Minute
Operating force 250±100gf
Operating life : 50,000 cycles
Operating temperature range : -40°C ~ 85°C
Total travel : 1.2±0.3mm

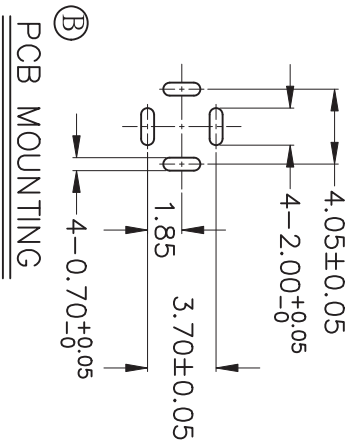

PCB MOUNTING



SWITCH FUNCTION

符號	原尺寸	修改後尺寸	變更日期
1	(A) 外觀設變9.55→9.0±0.2,PANEL MOUNTING Ø7.90→Ø8.00		MAR-25-2011
2	(B) Panel mounting加0.1與增加PCB mounting		MAY-18-2011
3	(C) 4.05尺寸加註公差+0.4/-0.1		AUG-16-2011
4	(D) ———— 增加LED規範		OCT-17-2011
5	(E-1) 依據ECN GC14040402設變,PBL底座與上蓋組裝改為超音波熔接結構		APR-21-2014
	(E-2) LED SPEC改為參閱規格書文字說明		APR-21-2014
6	(F) ———— 增加11.7尺寸標示		OCT-15-2015
7	(G) 提升產品結合強度,底座原超音波熔接更新結構為四卡扣		AUG-02-2017

SCALE (比例) : 3 : 2				大 廣 有 限 公 司 DA KOANG CO., LTD.			
TOLERANCE (公差) : 0.00 mm ± 0.25mm 0.0 mm ± 0.40mm ANGULAR : ± 5° FILE NAME : PBL0002				TITLE 圖名 Pushbutton Switches			
DWG NO. 5074				SIZE 圖紙 A4			
REV. 圖號 版本				UNIT 單位 mm			
H DATE NOV - 11 - 2010				SHEET 1 of 1			
CHECKED BY 審核				DRAWN BY 製圖 IRENE			