
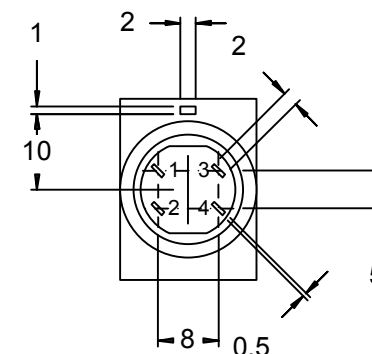
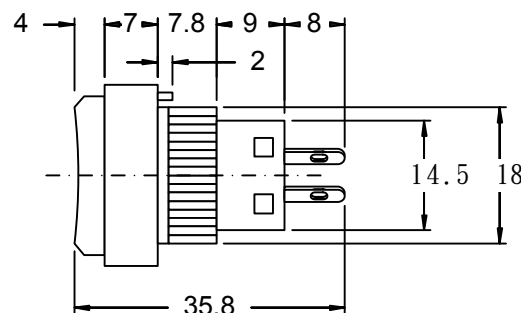



SWITCHING ACTION		
☒ L (self lock)	☐ N (non lock)	
CAP COLOR		
☐ G (green)	☐ R (red)	
☐ BL (blue)	☐ Y (yellow)	
LAMP VOLT		
☐ 6V		
☐ 12V		
☐ 24V		
☐ 110V		
☐ 220V		

General specifications

Circuit : PUSH ON
 Rating : A.C. 125V 3A
 Contact R.[max] : D.C. 5V 1A 30m !
 Insulation R.[min] : D.C. 500V 100M !
 Withstand VOL. : A.C. 500V 1m inute
 Operating force : 250" 50g
 Life cycle[max] : 40,000 CYCLES

Schematic

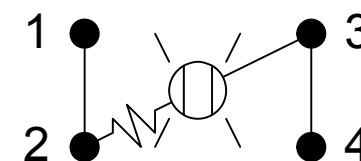

大 廣 有 限 公 司
 DA KOANG CO., LTD.

比例 SCALE

單位 DIMENSION mm

DO NOT SCALE DRAWING
TOLERANCES UNLESS OTHERWISE

UP TO 10 0.3
 ABOVE 10 TO 100 0.5
 ABOVE 100 0.8
 ANGULAR DIMENSIONS 5°

品名 TITLE

PUSH BUTTON SWITCH

型號 MODEL

5126

繪 圖
DRAWN

核 准
APPROVED



版 次
REVISION

A

日 期
DATE

2007/04/20