

SWITCHING ACTION

☒ L (self lock) ☐ N (non lock)

CAP COLOR

☐ G (green) ☐ R (red)
☐ BL (blue) ☐ Y (yellow)





LAMP VOLT

☐ 6V
☐ 12V
☐ 24V
☐ 110V
☐ 220V

General specifications

Circuit : PUSH ON
 Rating : A.C. 125V 3A
 Contact R.[max] : D.C. 5V 1A 30m
 Insulation R.[min] : D.C. 500V 100M
 Withstand VOL. : A.C. 500V 1minute
 Operating force : 250! 50g
 Life cycle[max] : 40,000 CYCLES

Schematic

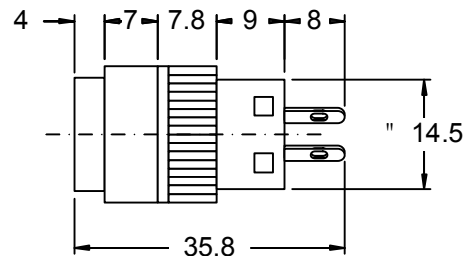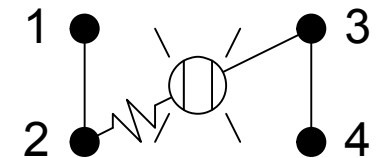

大 廣 有 限 公 司
 DA KOANG CO., LTD.

比例 SCALE

單位 DIMENSION m m

DO NOT SCALE DRAWING
 TOLERANCES UNLESS OTHERWISE

UP TO 10 0.3
 ABOVE 10 TO 100 0.5
 ABOVE 100 0.8
 ANGULAR DIMENSIONS 5°

品名 TITLE


PUSH BUTTON SWITCH

型號 MODEL

5127

繪 圖
 DRAWN

核 准
 APPROVED



版 次
 REVISION

A

日 期
 DATE

2007/04/20