



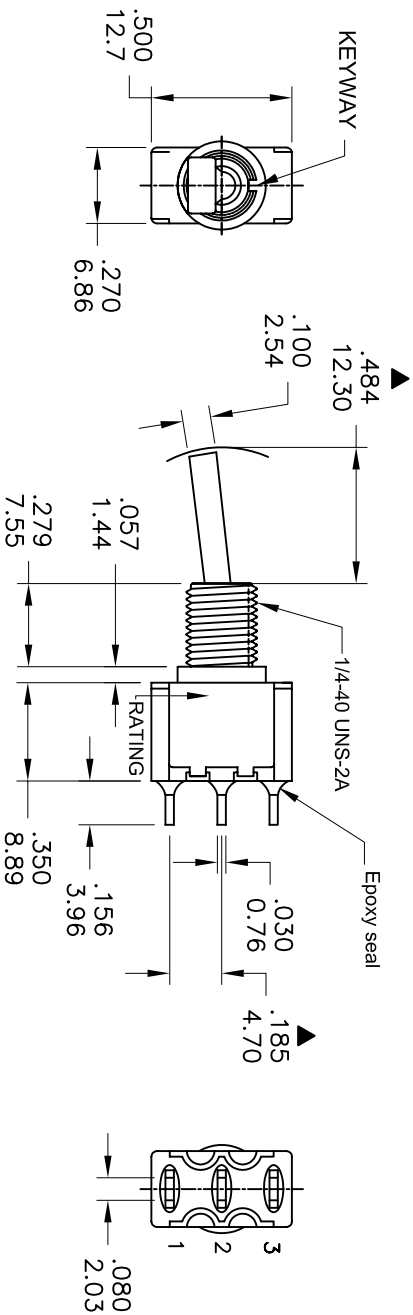

DAILYWELL copyright, may not be used
without permission from DAILYWELL

Model No.	POS.1	POS.2	POS.3
1MS1	ON	NONE	ON
Term. Comm.	2-3	OPEN	
SCHEMATIC			

SWITCH FUNCTION

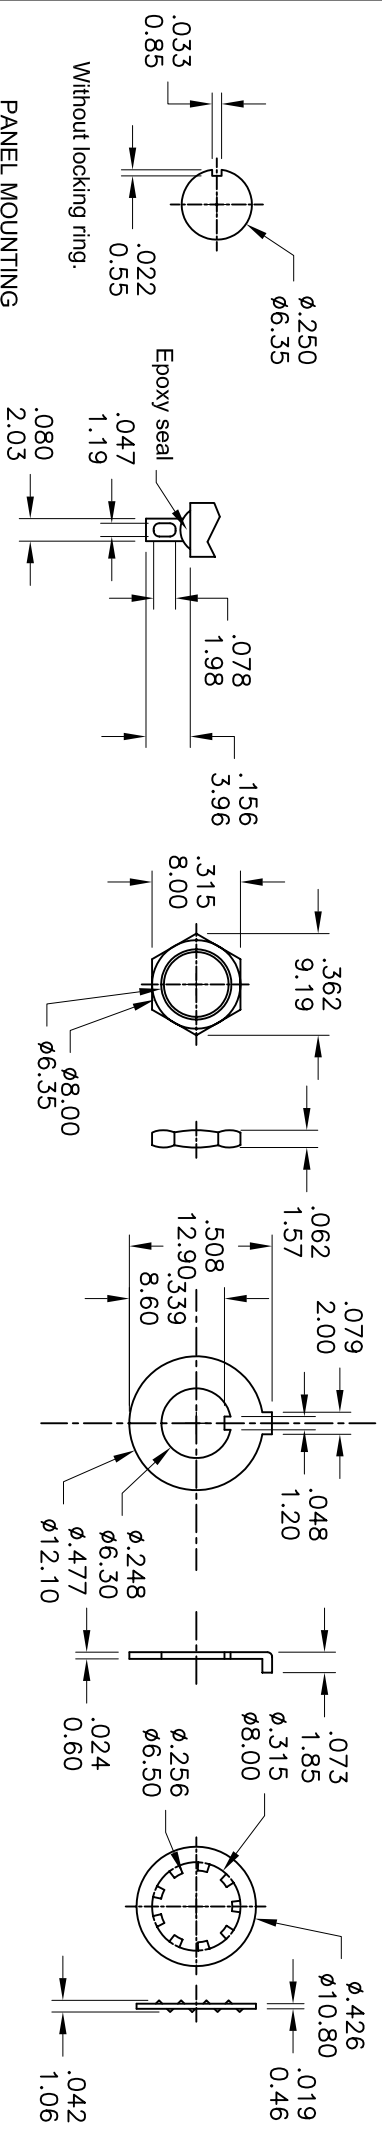

RATING :

R : 0.4 Volt-Amps(VA) max. @20V max.(AC or DC)
Q : 2Amps @250VAC
5Amps @120 VAC or 28 VDC

MATERIALS

CASE: Dially phthalate (DAP) (UL94v-0).
ACTUATOR: Brass,chrome plated.
BUSHING: Brass,nickel plated.
HOUSING: Stainless Steel.
TERMINAL/CONTACT: Silver or gold plated.

SOLDER LUG

PANEL MOUNTING

SPECIFICATIONS

MECHANICAL LIFE: 40,000 make-and-break cycles.
CONTACT RESISTANCE: 10mΩ max. initial @ 2-4VDC
100mA for both silver and gold plated contacts.
INSULATION RESISTANCE: 1,000MΩ min.
DIELECTRIC STRENGTH: 1,000 V RMS@sea level.
OPERATING TEMPERATURE: -30° C to 85° C.

	符號	原尺寸	修改後尺寸	變更日期	SCALE (比例) : 3 : 2				TITLE 圖名		Miniature Toggle Switches			SIZE 圖紙	A4	
1	Ⓐ				TOLERANCE (公差): 0.00 mm ± 0.25mm				DWG NO. 圖號		5193		UNIT 單位	inch	mm	
2	Ⓑ				0.0 mm ± 0.40mm				REV. 版本		A	DATE 日期	AUG - 04 - 2006		SHEET 張數	1 of 1
3	Ⓒ				ANGULAR : ± 5°				CHECKED BY 審核		RICHARD		DRAWN BY 製圖		ODA	
4	Ⓓ				FILE NAME : 1MSP0895											
5	Ⓔ															