



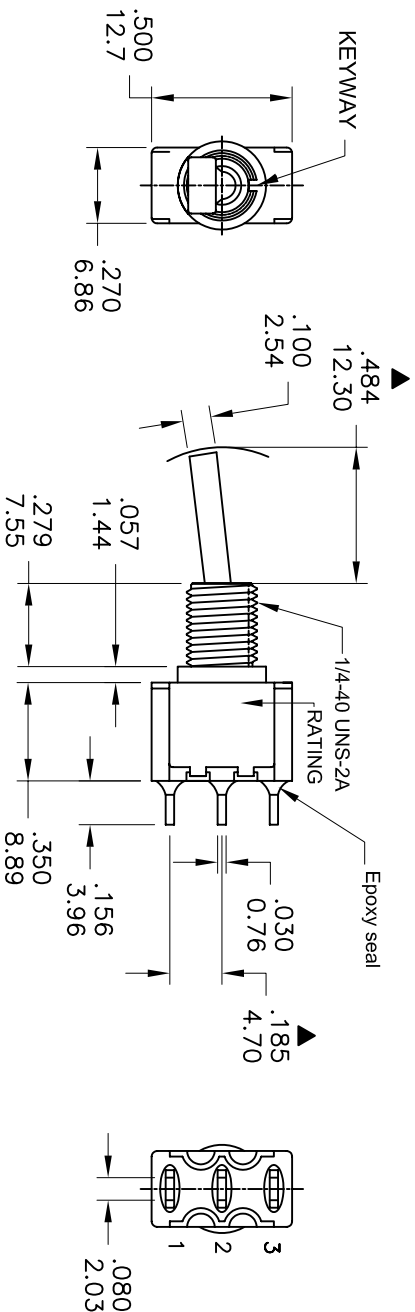

Model No.	POS.1	POS.2	POS.3
1MS3 Term. Comm.	ON	OFF	ON
2-3			2-1
SCHEMATIC	OPEN		

SWITCH FUNCTION

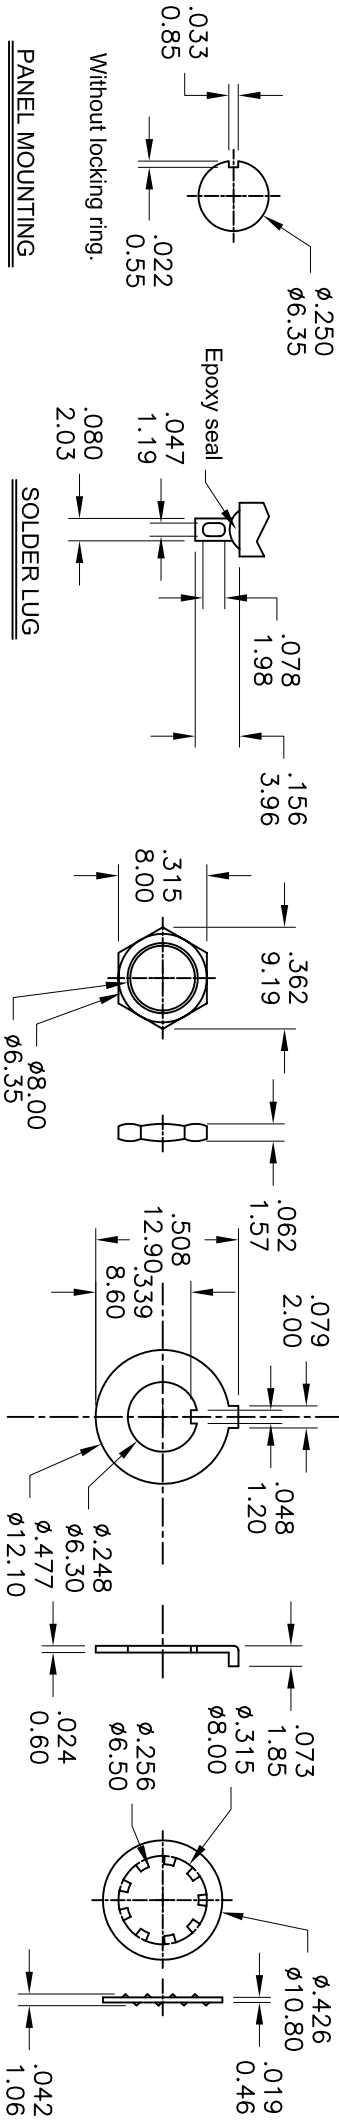

RATING :

R : 0.4 Volt-Amps(VA) max. @20V max.(AC or DC)
Q : 2Amps @250VAC
5Amps @120 VAC or 28 VDC

SPECIFICATIONS
MECHANICAL LIFE: 40,000 make-and-break cycles.
CONTACT RESISTANCE: 10mΩ max. initial @ 2-4VDC
100mA for both silver and gold plated contacts.
INSULATION RESISTANCE: 1,000MΩ min.
DIELECTRIC STRENGTH: 1,000 V RMS@sea level.
OPERATING TEMPERATURE: -30° C to 85° C.

MATERIALS
CASE: Dially phthalate (DAP) (UL94v-0).
ACTUATOR: Brass,chrome plated.
BUSHING: Brass,nickel plated.
HOUSING: Stainless Steel.
TERMINAL/CONTACT:Silver or gold plated.

大 廣 有 限 公 司 DA KOANG CO., LTD.

符號	原尺寸	修改後尺寸	變更日期	SCALE (比例) : 3 : 2			
1	①			TOLERANCE (公差) : 0.00 mm ± 0.25mm 0.0 mm ± 0.40mm ANGULAR : ± 5° FILE NAME : 1MSP1030			
2	②						
3	③						
4	④						
5	⑤						
				TITLE 圖名	Miniature Toggle Switches	SIZE 圖紙	A4
				DWG NO. 圖號	5193A	UNIT 單位	inch mm
				REV. 版本	A	DATE 日期	NOV - 13 - 2006
				CHECKED BY 審核	RICHARD	DRAWN BY 製圖	SHEET 張數
				ODA			