


本公司智慧財產，未經同意不得複製
DAILYWELL copyright, may not be used
without permission from DAILYWELL

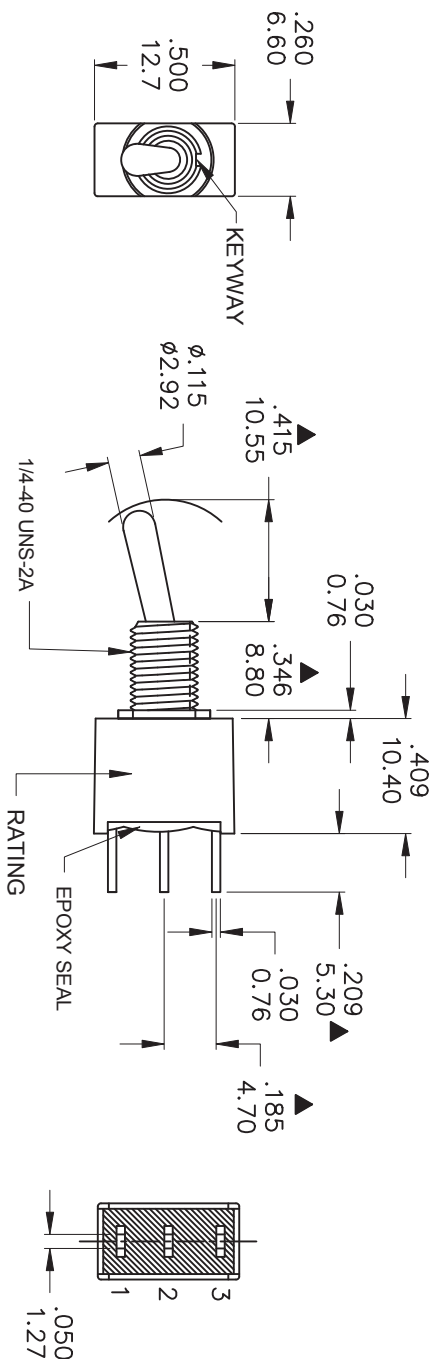


Model No.	POS.1	POS.2	POS.3
1AS1	ON	NONE	ON
Term. Comm.	2-3	N/A	2-1
			

SWITCH FUNCTION

PART NO.	PART NAME	QTY
1	MNU-1M01A	2
2	MNU-1M02	1
3	MNU-1M03	1

FILE NAME: HARDWARE-0002

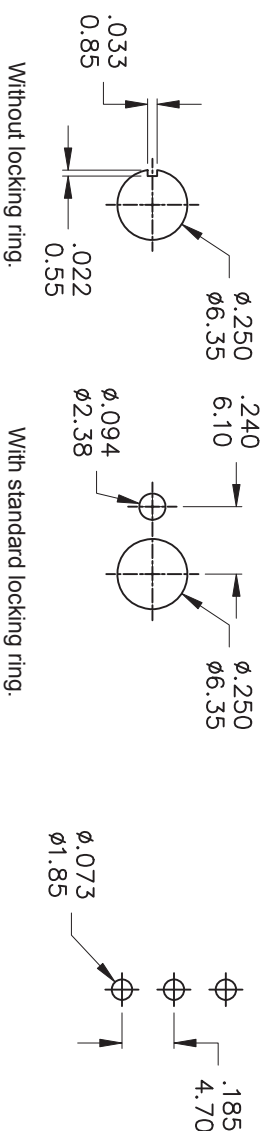

PANEL MOUNTING

P.C. MOUNTING

SPECIFICATIONS

MECHANICAL LIFE: 30,000 make-and-break cycles.

CONTACT RESISTANCE: 10 m Ω max. initial @ 2-4VDC

100mA for both silver and gold plated contacts.

INSULATION RESISTANCE: 1,000 M Ω min.

DIELECTRIC STRENGTH: 1,000 Vrms min.@sea level.

OPERATING TEMPERATURE: -40°C to 85°C.

Ⓐ

MATERIALS

CASE BUSHING: Glass filled nylon 6/6, flame retardant,

heat stabilized(UL94v-0).

ACTUATOR: Brass,chrome plated with internal, O-ring seal standard..

CONTACT/TERMINAL: Copper alloy.

RoHS & Lead Free

	符號	原尺寸	修改後尺寸	變更日期	SCALE (比例) : 3 : 2					
1	Ⓐ		操作溫度-30修訂為-40	AUG-17-2017	TOLERANCE (公差) : 0.00 mm ± 0.25mm					
2	Ⓑ				0.0 mm ± 0.40mm					
3	Ⓒ				0.0 mm ± 0.40mm					
4	Ⓓ				ANGULAR : ± 5°					
5	Ⓔ				FILE NAME : 1ASPD483					
					TITLE 圖名		Sealed Miniature Toggle Switches		SIZE 圖紙	A4
					DWG NO. 圖號		5195-1		UNIT 單位	inch mm
					REV. 版本		B	DATE 日期	AUG - 27 - 2012	
					CHECKED BY 審核				DRAWN BY 製圖	
									IRENE	