



本公司智慧財產，未經同意不得複製
DAILYWELL copyright, may not be used
without permission from DAILYWELL

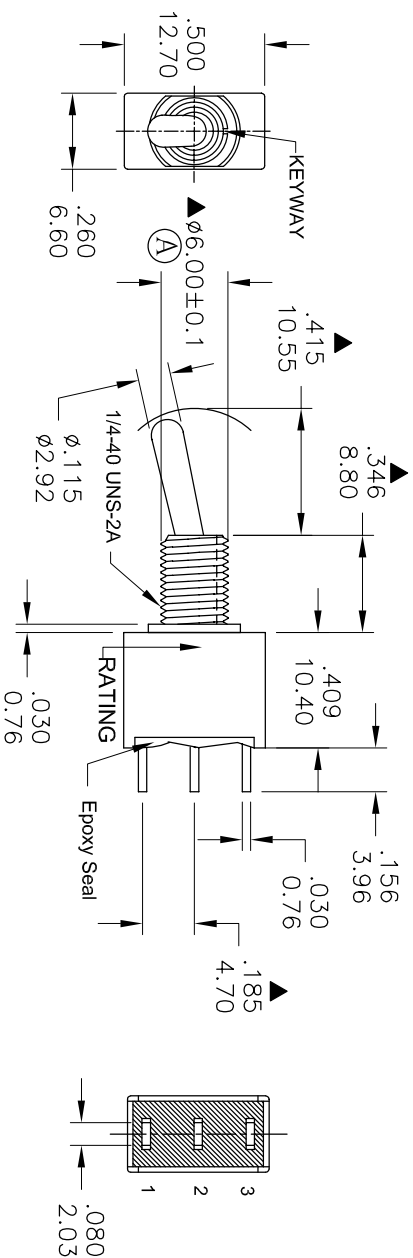

Model No.	POS.1	POS.2	POS.3
			
1AS2	ON	NONE	MOM
Term. Comm.	2-3	N/A	2-1
SCHEMATIC			

SWITCH FUNCTION

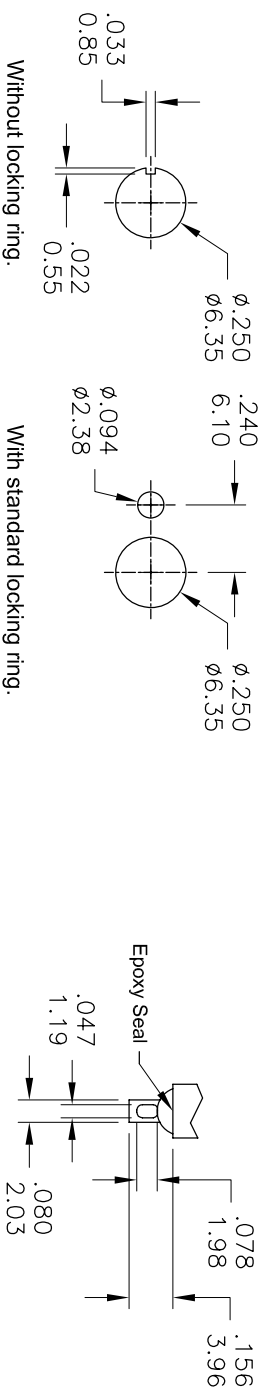

PANEL MOUNTING

SOLDER LUG

SPECIFICATIONS

MECHANICAL LIFE: 30,000 make-and-break cycles

CONTACT RESISTANCE: 10mΩ max. initial @ 2-4VDC

100mA for both silver and gold plated contacts.

INSULATION RESISTANCE: 1,000M Ω min.

DIELECTRIC STRENGTH: 1,000 V RMS@sea level.

OPERATING TEMPERATURE: -30°C to 85°C.

MATERIALS

CASE BUSHING: Glass filled nylon 66, flame retardant, heat stabilized(UL94v-0).

R : 0.4 Volt-Amps(VA) max. @20V max.(AC or DC)
Q : 2Amps @250VAC

ACTUATOR: Brass,chrome plated with internal, O-ring seal standard.

SWITCH SUPPORT: Brass or steel, tin plated.

SWITCH SUPPORT RETAINER: Stainless Steel.

CONTACT/TERMINAL: copper alloy, with Silver or gold plated.

RoHS: 2002/95/EC

	符號	原尺寸	修改後尺寸	變更日期	SCALE (比例) : 3 : 2					
1	Ⓐ		增加銅頭直徑標示	MAY - 22 - 2008	TITLE 圖名		Sealed Miniature Toggle Switches		SIZE 圖紙	A4
2	Ⓑ				DWG NO. 圖號		5195A		UNIT 單位	inch mm
3	Ⓒ				REV. 版本		B		DATE 日期	
4	Ⓓ				CHECKED BY 審核		RICHARD		DRAWN BY 製圖	
5	Ⓔ				FILE NAME : 1ASP0176				SHEET 張數	
									ODA	
									1 of 1	