

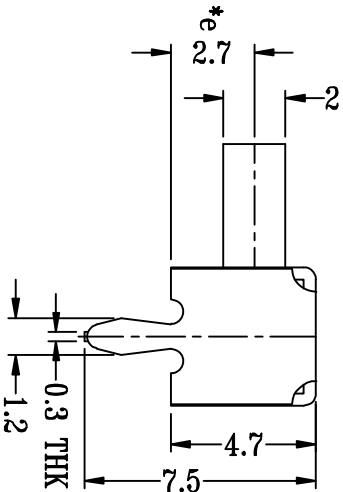
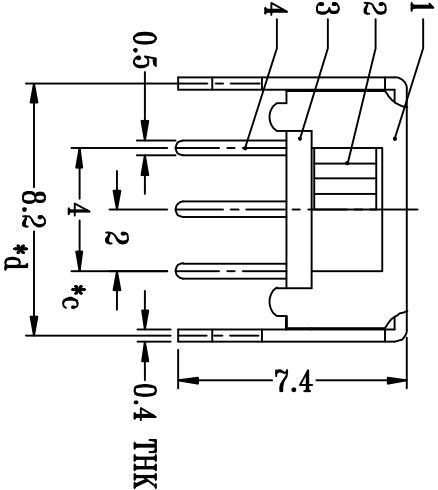
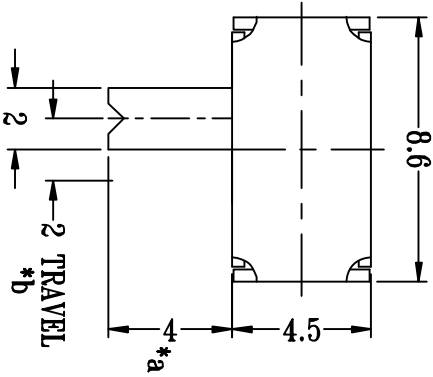


General specifications

Circuit	: ON-ON(1P2T)
Rating	: D.C. 50V 0.3A
Contact R.[max]	: 50mΩ (initial)
Insulation R.[min]	: D.C. 500V 100MΩ
Withstand VOL.	: A.C. 500V 1minute
Timing	: Non Shorting
Operating force	: 250±50g
Life cycle	: 10, 000 CYCLES

SCHEMATIC



MATERIAL SPECIFICATIONS

ITEM	PART NAME	MATERIAL	QTY	FINISH
1	FRAME	Steel Strip	1	Sn Plated
2	KnOB	PA66	1	BLACK
3	BASE	Phenolic Resin	1	Natural
4	TERMINAL	Brass Strip	3	Ag Plated
5	CONTACT CLIP	PBS C5210R-EH	1	Ag CLAD
6	SPRING PLATE	PBS Strip	1	Natural

品名 TITLE Slide Switch

型號 MODEL 5072

繪圖 DRAWN	HSB	核准 APPROVED	HSB	日期 DATE
				2019/05/24
版次 REVISION	A			

大 廣 有 限 公 司
DA KOANG CO., LTD.

比例 SCALE	N/A
單位 DIMENSION	m m
DO NOT SCALE DRAWING	
TOLERANCES UNLESS OTHERWISE	
UP TO 10	± 0.3
ABOVE 10 TO 100	± 0.5
ABOVE 100	± 0.8
ANGULAR DIMENSIONS	± 5°