
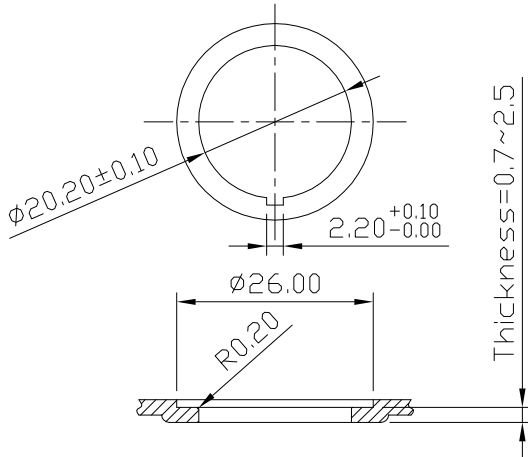

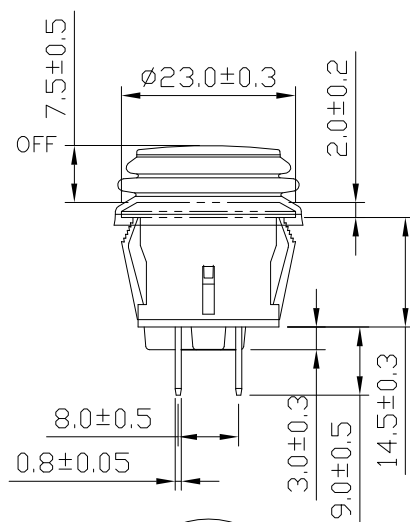
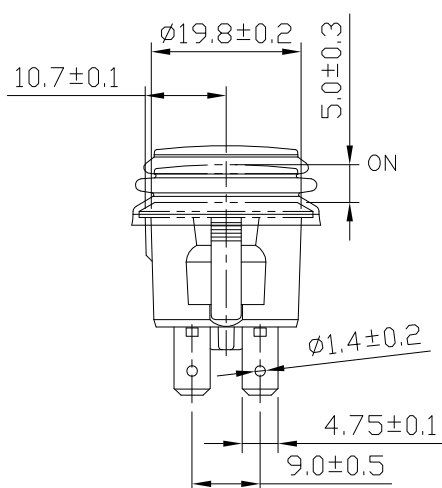
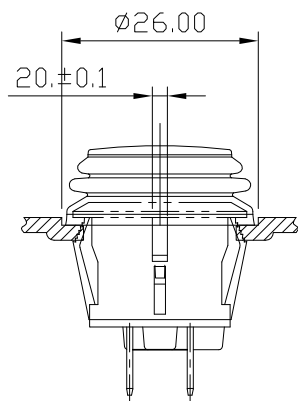



Rating	6A 250VAC	Mounting Hole 
Contact Resistance	50m ohm Max.	
Insulation Resistance	DC 500V 100M ohm Min.	
Dielectric Strength	AC 1500V 1 minute	
Operation Temperature	-25°C ~ 85°C	
Switch Function	4P SPST ON-OFF (Neon independent)	

***MATERIAL:**

Frame: Black, Nylon 66
Actuator: Yellow clear, PC
Terminals 1,2: Silver plated, Copper alloy
Terminals 3: Silver plated, Brass alloy
Terminals 4: Brass alloy
Waterproof Rubber: Black, Silicone
Printed: None



Circuit Diagram

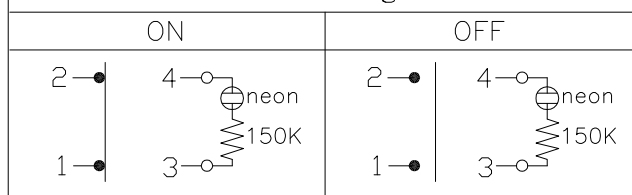

								△		
								△		
Date		Name	Description						NO	
Drawn	Checked	Approved	SCI BOM NO.	1830924		Model Name	PUSH SWITCH			
B.S.Wang		王 佰 山	Customer No.			Model No.	51577		REV.	
3/18/'10		03/23/'10	Unit	mm	大 廣 有 限 公 司 DA KOANG CO., LTD.				0	