
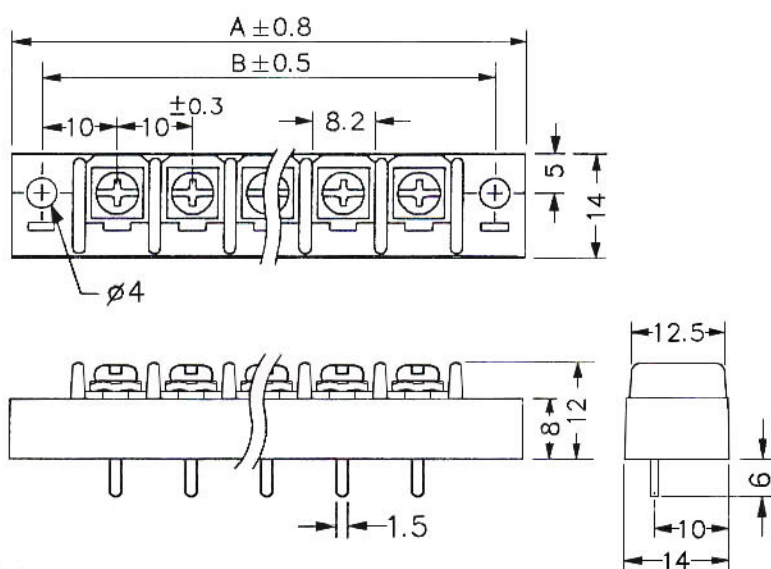


大 廣 有 限 公 司 DA KOANG CO., LTD.
ITEM NO. 3046 SERIES PITCH 10mm

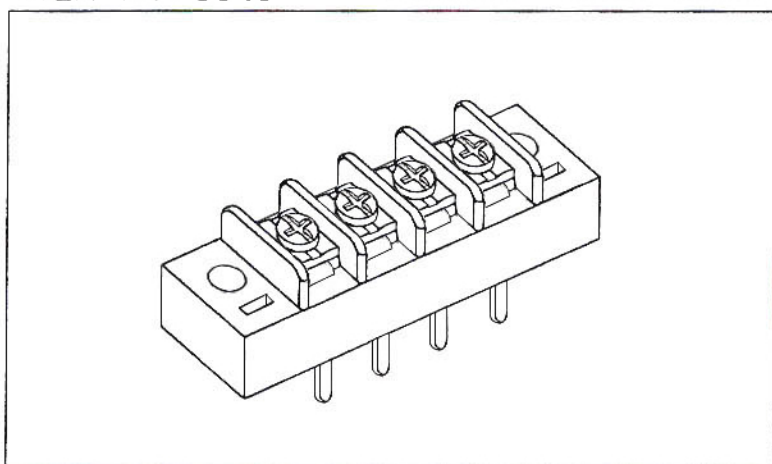

DIMENSION: mm

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A ± 0.8	42.3	52.3	62.3	72.3	82.3	92.3	102.3	112.3	122.3	132.3	142.3	152.3	162.3	172.3
B ± 0.5	30	40	50	60	70	80	90	100	110	120	130	140	150	160

POLE	16	17	18	19	20	21	22	23	24	25	26	27	28
A ± 0.8	182.3	192.3	202.3	212.3	222.3	232.3	242.3	252.3	262.3	272.3	282.3	292.3	302.3
B ± 0.5	170	180	190	200	210	220	230	240	250	260	270	280	290

NUMBER OF POLE 02~28

SPECIFICATIONS

Rated:	15A 300VAC
Insulation Withstands Voltage:	AC 2000V/min
Insulation Resistance:	1000M Ω or More at DC500V
Using Temperature Range:	-40 $^{\circ}$ C~+120 $^{\circ}$ C
Screw Torque Value:	10 Kg-cm
Wire Range Awg:	14 - 22 STR
Insulator Body :	Plastic NYLON 66
Terminals:	Brass, Tin Plated 0.8t
Terminal Screws:	M3.0 Nickel Plated Steel