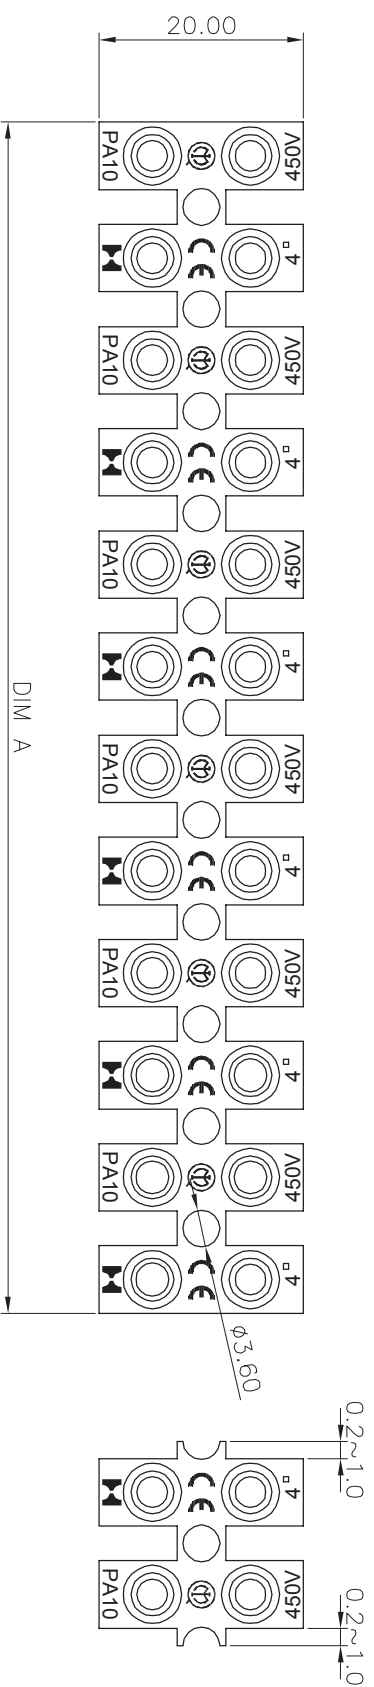


ALL DIMENSION IN MM UNLESS OTHERWISE STATED : 0.= ±0.2mm 00.= ±0.4mm

Housing Material: Polyamide 66 (PA66), Nature flame-retardant to UL 94V-2

Voltage : 300V (UL), 450V (VDE)

Current : 30A (UL), 32A (VDE)

Working Temperature : T110 (IEC), 105° C (UL)

Insert: Brass, nickel-plated

Screws : M3.0x6, Steel zinc-plated

Wire Range : 1.0 ~ 4.0mm², #22 ~ #10 Sol. #14 ~ #10 Str.

International Approvals

UL, CSA, CE, VDE, FIMKO, SEMKO, NEMKO, DEMKO, KEMA, OVE, CEBEC, SEV, CQC, IMQ

NO POSN	DIM A
2	16.6 ± 0.3
3	26.6 ± 0.5
4	36.6 ± 0.5
5	46.6 ± 0.7
6	56.6 ± 0.7
7	66.6 ± 0.7
8	76.6 ± 1.0
9	86.6 ± 1.0
10	96.6 ± 1.0
11	106.6 ± 1.5
12	117.2 ± 1.5

大 廣 有 限 公 司 DA KOANG CO., LTD.

TITLE :

TERMINAL BLOCK
Model NO. 3333A
Part NO. PA10H

Drawn By

Rev.

kuan
2019. 06. 26

A2