
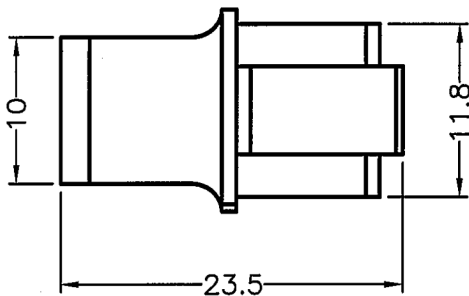



成型尺寸	公差
5mm以下	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm以上	±1.0

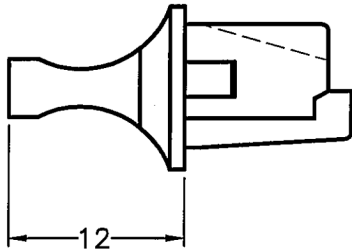

PART NO.	COLOR
3404	BLACK

QMFZ2 Component - Plastics
 FORMOSA CHEMICALS & FIBRE CORP
 PLASTICS DIV 201 TUNG HWA N RD TAIPEI 105 TAIWAN
 Material Designation: AG15E1

Friday, October 24, 2003

E162823

Product Description: Acrylonitrile Butadiene Styrene (ABS), designated "TAIRILAC" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	1.6	HB	5	0	60	60	60	-	-
	3	-	-	-	60	60	60	-	-
CTI: 0		HVTR: 0		D495: 6		IEC Ball Pressure (Ck) -			

Dielectric Strength (kV/mm): -

Volume Resistivity (10⁹ohm-cm): -

Dimensional Stability(%): -

ISO Tensile Strength (MPa): -

ISO Flexural Strength (MPa): -

ISO Heat Deflection (°C): -

ISO Tensile Impact (kJ/m²): -

ISO Izod Impact (kJ/m²): -

ISO Charpy Impact (kJ/m²): -

Report Date: 11/1/1995

Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices a

大 廣 有 限 公 司 DA KOANG CO., LTD.				TITLE PC防塵蓋		產品規格圖面	
				MATERIAL ABS UL94HB		DATE 2001.03.28	
				FINISH		DRAWN S.J.C	
				COLOR SEE ABOVE		CHECK 	
PART NUMBER SEE ABOVE		DRAWING NUMBER 3404		UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED 	
SIZE A4	SCALE 2:1	UNIT mm	REV B				