

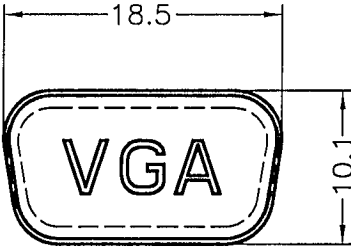



成型尺寸	公差
5mm以下	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm以上	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

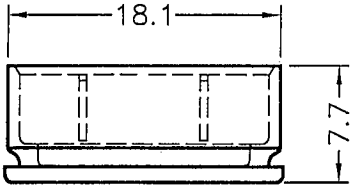

內孔配合尺寸

PART NO.	COLOR
3418	BLACK

QMFZ2 Component - Plastics
NAN YA PLASTICS CORP PLASTICS 4TH DIV
3RD FL 201 TUNG HWA NORTH RD TAIPEI TW
Material Designation: 3117(f1)

Friday, October 24, 2003

E130155

Product Description: Polypropylene (PP), furnished as pellets, sheets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	1.5	HB	3	0	125	125	125	-	-
	3	HB	2	0	125	125	125	-	-

IEC CTI:

CTI: 0

HVTR: 0

D495: 4

IEC Ball Pressure (°C): -

Dielectric Strength (kV/mm): -

Volume Resistivity (10¹⁰ohm-cm): -

Dimensional Stability(%): -

ISO Tensile Strength (MPa): -

ISO Flexural Strength (MPa): -

ISO Heat Deflection (°C): -

ISO Tensile Impact (kJ/m²): -
(f1)

ISO Izod Impact (kJ/m²): -

ISO Charpy Impact (kJ/m²): -

Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.

Report Date: 1/28/1991

Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULI.

大 廣 有 限 公 司 DA KOANG CO., LTD.				TITLE	防塵蓋	產品規格圖面	
				MATERIAL	PP	DATE	2008.01.02
				FINISH		DRAWN	BUNNY
				COLOR	SEE ABOVE	CHECK	
PART NUMBER	3418			DRAWING NUMBER			
SIZE	A4	SCALE	2:1	UNIT	mm	REV	B
				UNLESS OTHERWISE SPECIFIED TOLERANCE	SEE ABOVE	APPROVED	