


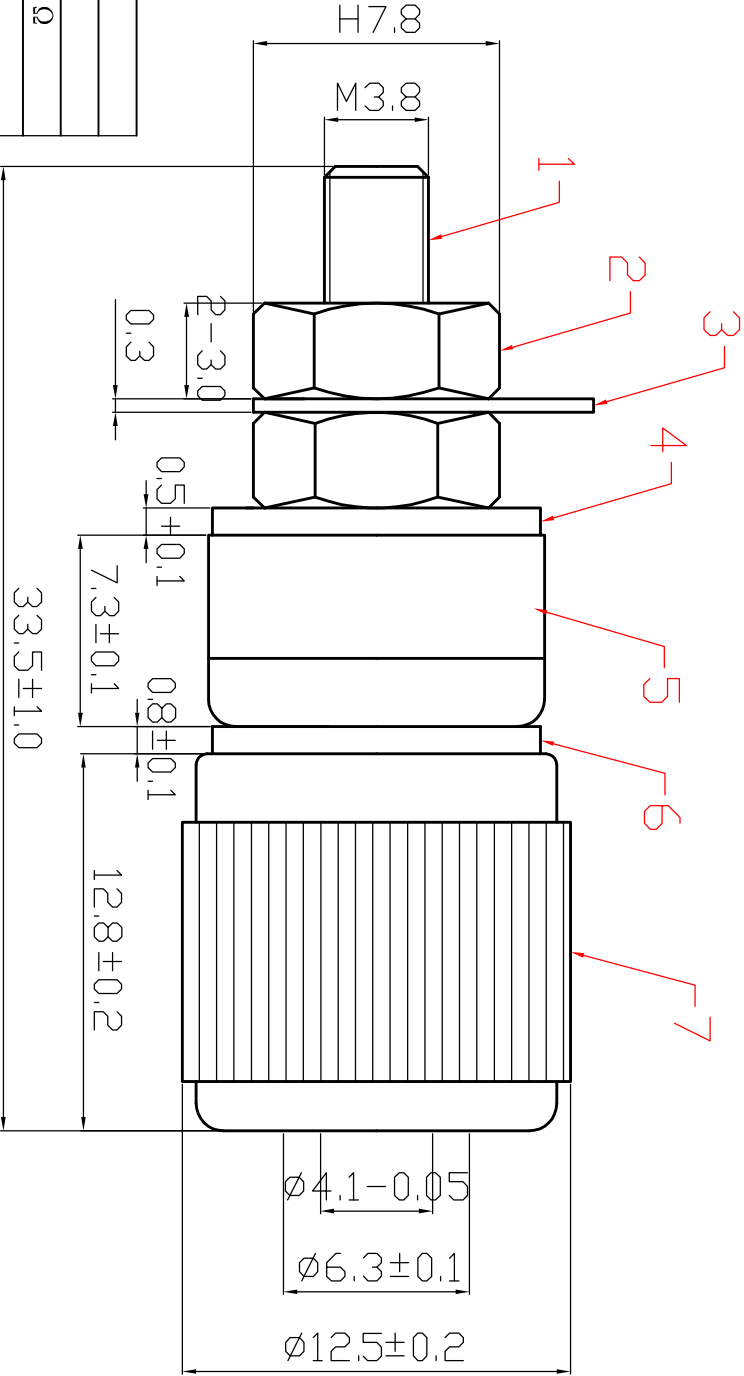

ELECTRICAL CHARACTERISTIC	
(1)	CONTACT RESISTANCE: ≤20mΩ
(2)	INSULATION RESISTANCE: ≥10MΩ
(3)	WITHSTAND VOLTAGE:DC300V
(4)	CURRENT RATING:5A/DC150V
(5)	OPERATING TEMPERATURE: -30℃~60℃

7	SHELL	ABS
6	COPPER PATCH	Cu
5	PLASTIC HANDLE	ABS
4	WASHER	Cu
3	EARTHING PATCH	Cu

2	NUT	Zn
1	BODY	Cu
ITEM	DESIGNATION	MATERIAL

REV	PART NO.& SAMPLE NO.	DATE	BY
A	3111		
B			

TOLERANCE	SIGNATURES	DATE
0 - 10 10 - 99 100 - 999 1000 - 9999 10000 - 99999	±0.05 ±0.5 ±1.0 ±10.0 ±100.0	
	DRAFT: cheng huan	10.01.15
	CHECKED:	

	APPROVAL:	
	SHEET	SCALE
	OF	1:1
	UNIT	mm
	REV	Ø

大 廣 有 限 公 司
DA KOANG CO., LTD.

TITLE	Binding Post,Medium
CUSTOMER	(Red/Black)