
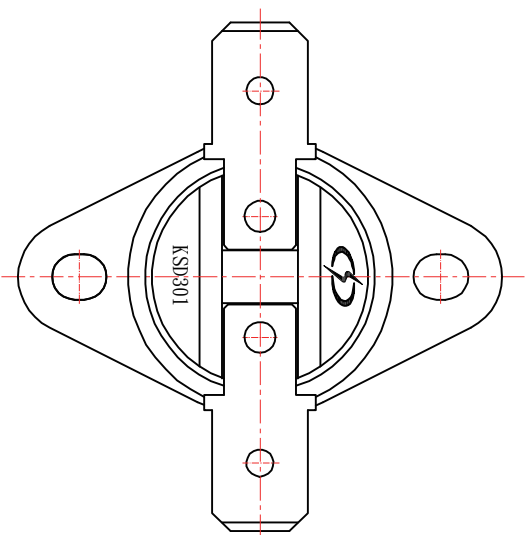


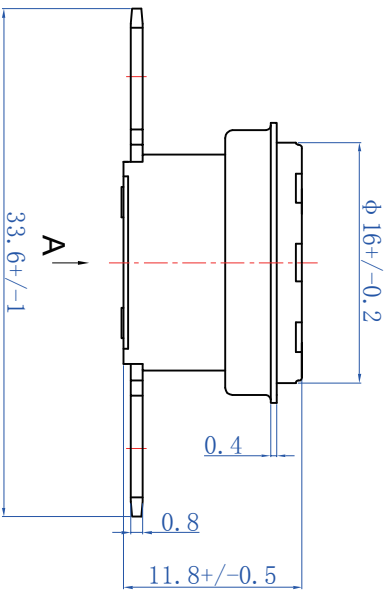

Technology Specification

1、Electric Performance:

Rated Voltage/Current:

250V/125V, 10A/15A

Protection Degree: IP00级

Operation Cycles: CQC、TUV 10000

VDE、UL 100000

Resistance of Contact: ≤50mΩ

Resistance of Insulated: ≥100MΩ

Test Voltage: ≥1500V/1min (Normality)

2、Relevant Standards

UL873, CSA C22. 2 NO 24-93

EN 60730-1 2012-10

EN 60730-2-9:2011-07

GB14536. 1-2008 idt IEC 60730-1-2008

GB14536. 10-2008 idt IEC 60730-2-9-2010

3、Certificate No:



✓ CQC: CQC04002009128 (Phenolic)

☐ TUV: 50035898

✓ VDE: 40020934

✓ U L: E251340

4、CUSTOMER: WY.

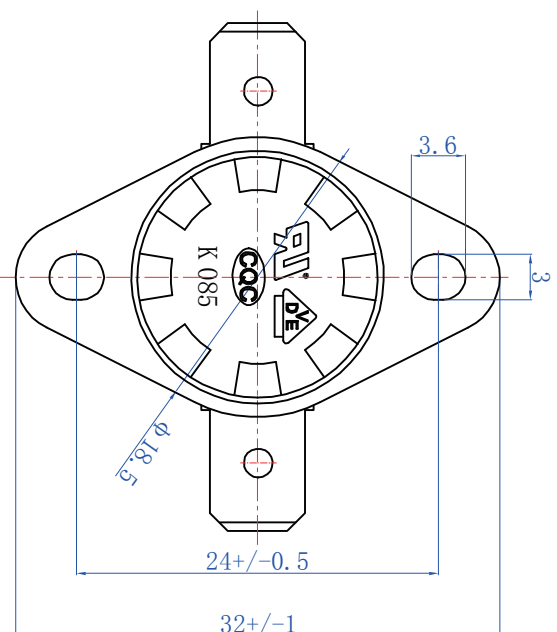

Cart. NO		9K3. 085/100PAK/22KB/RQUC-W	Model	5107N		
Auto/Manual reset		Auto reset	Name	Thermostat		
NO temperature		85+/-3℃	Code			
Off temperature		75+/-3℃				
Bracket		Movable bracket	Material	Ceramic body		
Terminal size		6.3 *0.8	Total	1/1	Edition	A/1
Designed by		刘春青 2017-02-15	大 廣 有 限 公 司 DA KOANG CO., LTD.			
Checked by						
Approved by		胡群雄 2017-02-15				
Date						
SIGNATURE	APPROVED BY	CUSTOMER				