

Technology Specification

1、Electric Performance:

Rated Voltage/Current:

250V/125V, 10A/15A

Protection Degree: IP00级

Operation Cycles: CQC、TUV 10000
VDE、UL 100000

Resistance of Contact: ≤50mΩ

Resistance of Insulated: ≥100MΩ

Test Voltage: ≥1500V/1min (Normality)

2、Relevant Standards

UL873, CSA C22.2 NO 24-93

EN 60730-1 2012-10

EN 60730-2-9:2011-07

GB14536.1-2008 idt IEC 60730-1-2008

GB14536.10-2008 idt IEC 60730-2-9-2010

3、Certificate No:




✓ CQC: CQC04002009128 (Phenolic)

✓ TUV: 50035898

☐ VDE: 40020934

☐ U L: E251340

4、CUSTOMER: WY.

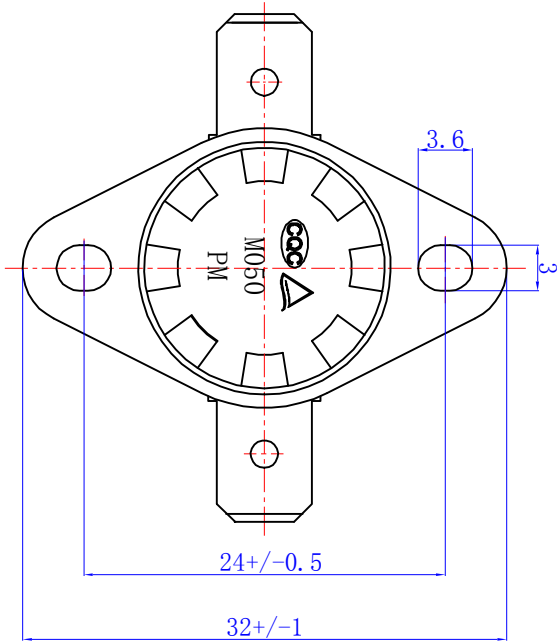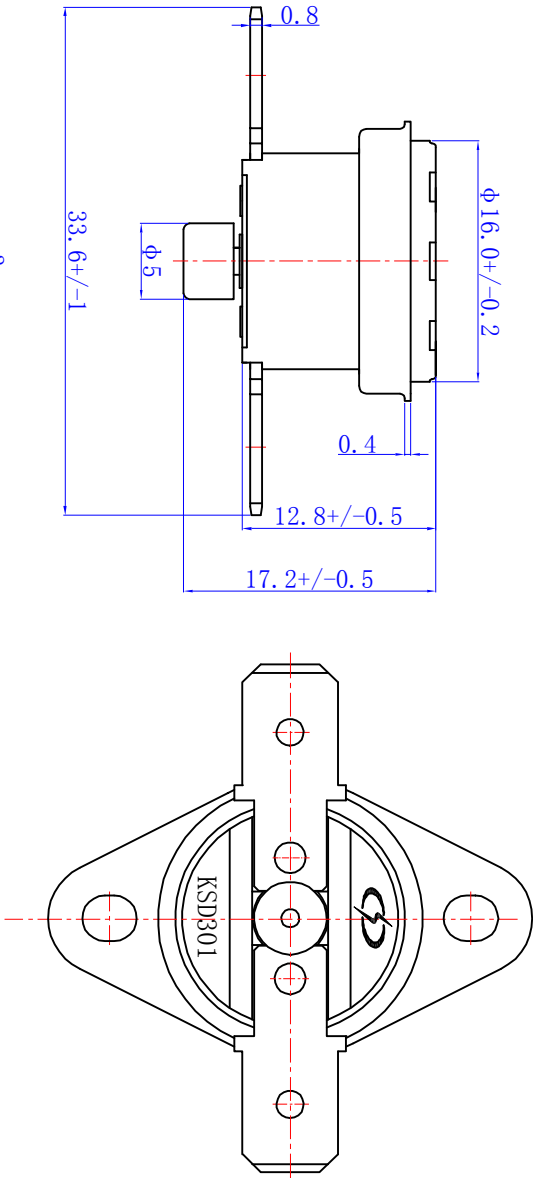

	Cart. NO	9K8. 050/103TAM/22TB/ QTC-WY.			Model	51070A		
	Auto/Manual reset	reset			Name	Thermostat		
	off temperature	50+/-5℃			Code			
	On temperature				Material	phenolic shell		
	Bracket	Movable bracket						
	Terminal size	6. 3 *0.8						
SIGNATURE	APPROVED BY	CUSTOMER	Designed by	刘春青 2017-02-17				
			Checked by					
			Approved by					
			Date					
			大 廣 有 限 公 司 DA KOANG CO., LTD.					