

Technology Specification

1、Electric Performance:

Rated Voltage/Current:

250V/125V, 10A/15A

Protection Degree: IP00级

Operation Cycles: CQC、TUV 10000

VDE、UL 100000

Resistance of Contact: ≤50mΩ

Resistance of Insulated: ≥100MΩ

Test Voltage: ≥1500V/1min (Normality)

2、Relevant Standards

UL873, CSA C22. 2 NO 24-93

EN 60730-1 2012-10

EN 60730-2-9:2011-07

GB14536. 1-2008 idt IEC 60730-1-2008

GB14536. 10-2008 idt IEC 60730-2-9-2010

3、Certificate No:





✓ CQC: CQC04002009128 (Phenolic)

✓ TUV: 50035898

☐ VDE: 40020934

☐ U L: E251340

4、CUSTOMER: WY.

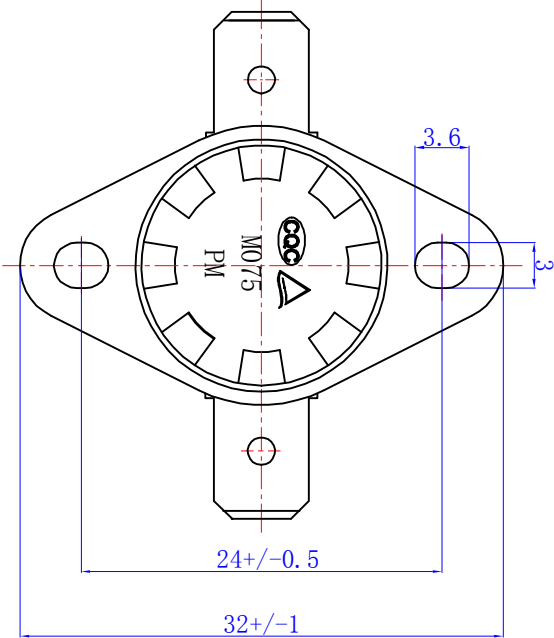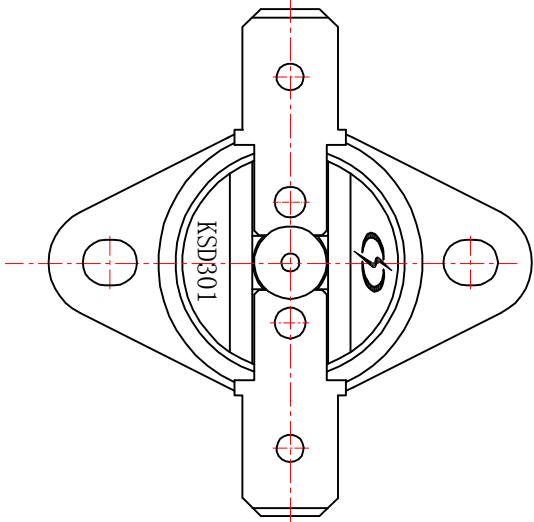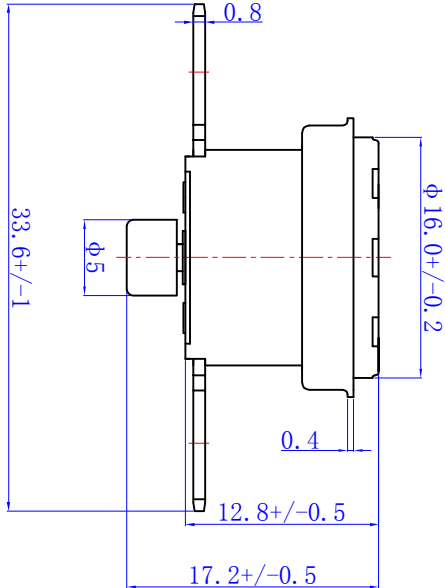

Cart. NO	9K8. 075 /103TAM/ 22TB/ 4TC-WY.	Model	51070C			
	Auto/Manual reset	reset	Name	Thermostat		
	off temperature	75+/-5℃	Code	XC-WK. CP/K3. 01-XXXX		
	On temperature		Material	phenolic shell		
	Bracket	Movable bracket	Total	1/1	Edition	A/1
Terminal size	6.3 *0.8					
Designed by	刘春青 2017-02-17					
Checked by						
Approved by						
Date						

SIGNATUREAPPROVED BYCUSTOMER

大 廣 有 限 公 司DA KOANG CO., LTD.