
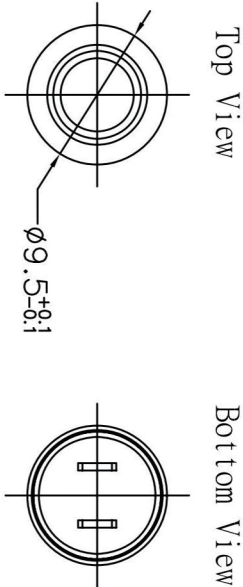
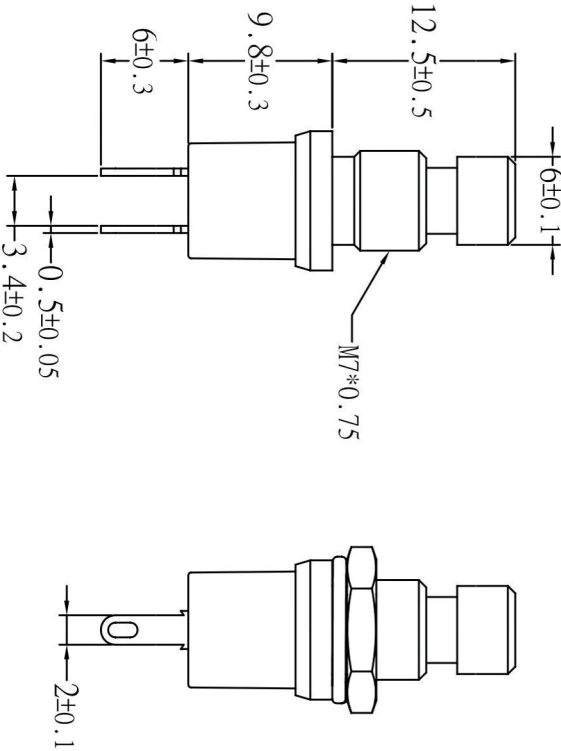
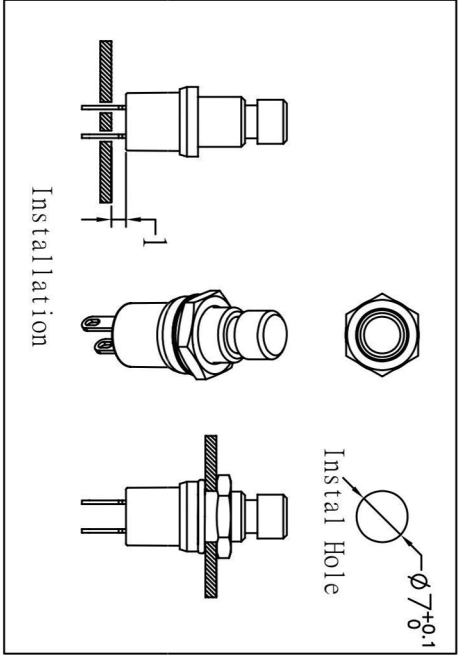


- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- Electrical rating: 1A 125V AC / 0.5A 250V AC
 - Circuit: 2P (SPST)
 - Function: PUSH ON-OFF
 - Contact Resistance: 2.5V DC 10mΩ or less
 - Insulation Resistance: 500V DC 100MΩ or More
 - Voltage Breakdown: 1000V AC 1min
 - Electrical life: 10,000 cycles
 - Temperature rise at the terminal: Max. 30℃
 - Solder ability of terminal: Max. 250℃ 2 Sec
 - Mtg. Hole Dia mm: 7 ϕ mm
 - Manual soldering temperature 350℃ 3 Sec

Button Color
Red
Black
White



5004B		SCALE	2:1	DIM	mm
		DMN.BY	H.R.S.	DATE	2009-12-28
		CHK.BY		APP.BY	
大廣有限公司 DA KOANG CO., LTD.			DWG.NO.	R-111-D02	
			PAGE	1/1	